




SkyMod® Wafer Linear Grid

LED


31W LED IM1589 LED 31 1 609

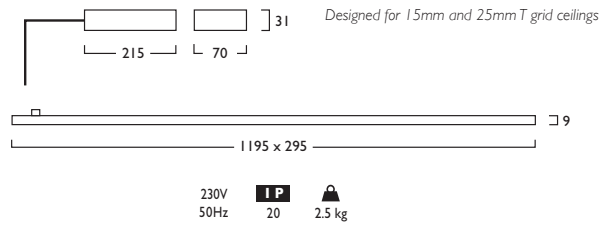

3	Warm White LED (3000K)	CRI 80 31W
	Lumen Output	3372 lm
	LOR	1.00
	CRI	80
	Total Power	33.2W
	Power Factor	0.95
	Running Current	0.15A
	Inrush Current	24.7A (268us)
	Efficacy	101 lm/W
	Emergency Output (BLF)	303 lm (9%)
4	Neutral White LED (4000K)	CRI 80 31W
	Lumen Output	3610 lm
	LOR	1.00
	CRI	80
	Total Power	33.2W
	Power Factor	0.95
	Running Current	0.15A
	Inrush Current	24.7A (268us)
	Efficacy	108 lm/W
	Emergency Output (BLF)	324 lm (9%)

- Ultra slim profile of only 9mm
- High quality Polycarbonate Micro Prism refractor offering UGR <19
- Luminance limit below 3000cd/m² at the 65° cut off
- Delivering up to 3610 lumens
- Efficacies up to 108 lm/W
- Life expectancy in excess of 50,000 hours (L80 B10)
- Wide choice of high quality control gear
- Wireless Lighting Control available, see Connected video for full overview

Photometrics



Gear types F & V must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- V** Digital Dim + SelfTest Emergency
- J** Switch Dim
- Y** Switch Dim + SelfTest Emergency
- S** DALI Dim
- U** DALI Dim + SelfTest Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales