



## Xcel® Wallwasher



### LED CRI 80

12W LED ID1342 LED 12 734

### LED CRI 90

12W LED ID1343 LED 12 735

- Injection moulded Shade and Lens construction
- Superior lighting class LED Modules and Drivers
- Lumens output up to 2069 lm with a UGR <19
- Efficacies up to 111 lm/W
- Life expectancy in excess of 75,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview

3	Warm White LED (3000K)
	Lumen Output
	LOR
	CRI
	Total Power
	Power Factor
	Running Current
	Inrush Current
	Efficacy
	Emergency Output (BLF)


CRI 80	12W
	1977 lm
	0.73
	80
	13.5W
	0.95
	0.06A
	6.0A (80us)
	106 lm/W
	N/A

CRI 90	12W
	1715 lm
	0.73
	90
	13.5W
	0.95
	0.06A
	6.0A (80us)
	92 lm/W
	N/A

4	Neutral White LED (4000K)
	Lumen Output
	LOR
	CRI
	Total Power
	Power Factor
	Running Current
	Inrush Current
	Efficacy
	Emergency Output (BLF)


CRI 80	12W
	2069 lm
	0.73
	80
	13.5W
	0.95
	0.06A
	6.0A (80us)
	111 lm/W
	N/A

CRI 90	12W
	1791 lm
	0.73
	90
	13.5W
	0.95
	0.06A
	6.0A (80us)
	96 lm/W
	N/A

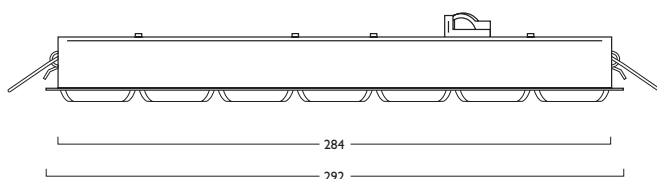

240V 50Hz IP 20 287 x 47mm 0.6 kg

### Photometrics

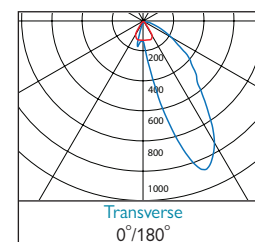

734 DLOR: 0.73

### Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- F Digital Dim
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)