



Figures shown below are based on Gear Type - A Internal Driver

	CRI 80	5W	7W	12W	17W
3 Warm White LED (3000K)					
Lumen Output		880 lm	1320 lm	2029 lm	2808 lm
LOR		0.90	0.90	0.90	0.90
CRI		80	80	80	80
Total Power		5.3W	8.0W	12.6W	18.3W
Power Factor		0.68	0.76	0.86	0.83
Running Current		0.02A	0.03A	0.05A	0.07A
Inrush Current (Std)		2.9A (60us)	2.9A (60us)	2.9A (60us)	4.0A (60us)
Inrush Current (Dim)		2.71A (38us)	2.71A (38us)	2.71A (38us)	3.31A (43us)
Efficacy		149 lm/W	148 lm/W	144 lm/W	138 lm/W
Emergency Output (BLF)		343 lm (39%)	343 lm (26%)	337 lm (16%)	337 lm (12%)
4 Neutral White LED (4000K)					
Lumen Output		917 lm	1376 lm	2116 lm	2928 lm
LOR		0.90	0.90	0.90	0.90
CRI		80	80	80	80
Total Power		5.3W	8.0W	12.6W	18.3W
Power Factor		0.68	0.76	0.86	0.83
Running Current		0.02A	0.03A	0.05A	0.07A
Inrush Current (Std)		2.9A (60us)	2.9A (60us)	2.9A (60us)	4.0A (60us)
Inrush Current (Dim)		2.71A (38us)	2.71A (38us)	2.71A (38us)	3.31A (43us)
Efficacy		155 lm/W	154 lm/W	151 lm/W	144 lm/W
Emergency Output (BLF)		358 lm (39%)	358 lm (26%)	352 lm (16%)	337 lm (12%)

Microbezel® 300 Surface



LED CRI 80

Power	LED	SD1607	LED	05	+
5W	LED	SD1607	LED	05	+
7W	LED	SD1607	LED	07	+
12W	LED	SD1607	LED	12	+
17W	LED	SD1607	LED	17	+

Add required Reflector to code from list shown over (Options - Reflector)


- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction & extrusion
- Range of Reflector options available, Chrome, Semi Matt, Dark Light & Gold
- Single point Zhaga Book 3 LED
- Choice of Diffuser options for customisation
- Choice of outputs up to 2928 lumens
- Efficacies up to 155 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview
- Alternative CRI 90 options available (SD1608)

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Reflector and Polycarbonate Options - Examples Shown on page 2

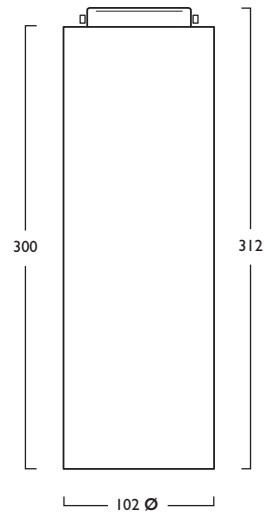

230V
50Hz

IP
20

⊕ ⊖
50mm

⚠
1.05 kg

Microbezel® 300 Surface

Options

■ Reflector / Polycarbonate Options



574 Chrome - Narrow Beam
045 Chrome - Medium Beam
575 Chrome - Wide Beam



620 Matt Matt - Wide Beam



621 Dark Light - Narrow Beam
622 Dark Light - Medium Beam
623 Dark Light - Wide Beam



624 Gold - Narrow Beam
625 Gold - Medium Beam
626 Gold - Wide Beam

Reflector	▲ ▲		▲ ▲		▲ ▲		▲ ▲	
	▲	▲	▲	▲	▲	▲	▲	▲
	▲	▲	▲	▲	▲	▲	▲	▲
574 Chrome - Narrow Beam	20°	590	593	624 Gold - Narrow Beam	26°	715	718	
045 Chrome - Medium Beam	38°	589	592	625 Gold - Medium Beam	52°	716	719	
575 Chrome - Wide Beam	56°	591	594	626 Gold - Wide Beam	74°	717	720	
620 Semi Matt - Wide Beam	72°	705	708					
621 Dark Light - Narrow Beam	26°	709	712					
622 Dark Light - Medium Beam	62°	710	713					
623 Dark Light - Wide Beam	84°	711	714					



507 Flush Clear (IP44)




508 Flush Opal (IP44)




563 Cylo Etched Ice

Microbezel® 300 Surface


Photometrics

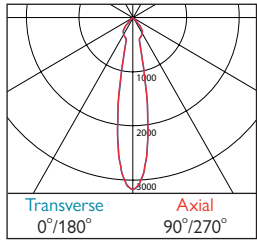


590 / 593 DLOR: 0.91
Chrome - Narrow Beam

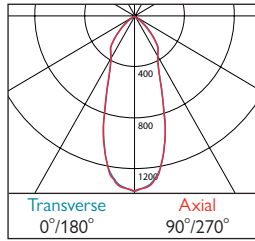


589 / 592 DLOR: 0.91
Chrome - Medium Beam

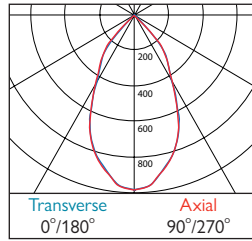


591 / 594 DLOR: 0.91
Chrome - Wide Beam

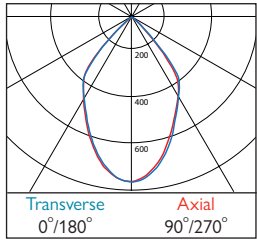


705 / 708 DLOR: 0.83
Semi Matt - Narrow Beam

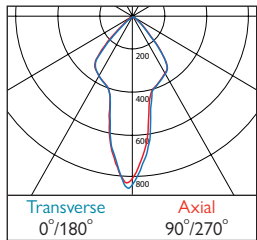


709 / 712 DLOR: 0.65
Dark Light - Narrow Beam

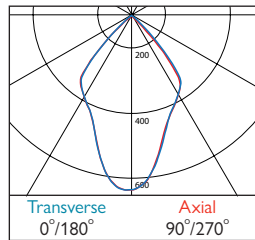


710 / 713 DLOR: 0.68
Dark Light - Medium Beam

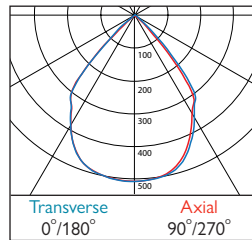


711/714 DLOR: 0.67
Dark Light - Wide Beam

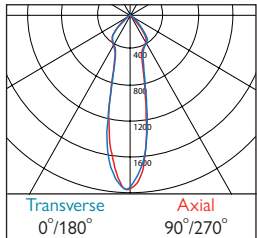

715 / 718 DLOR: 0.85
Gold - Narrow Beam

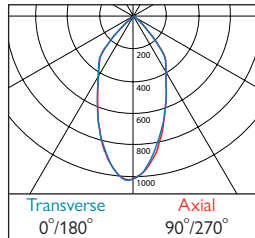

716 / 719 DLOR: 0.84
Gold - Medium Beam

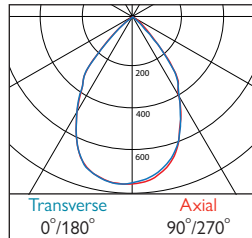

717 / 720 DLOR: 0.84
Gold - Wide Beam