

Link Module shown


3	Warm White LED (3000K)	CRI 80	
		29W	43W
	Lumen Output	5065 lm	7050 lm
	LOR	0.87	0.87
	CRI	80	80
	Total Power	31.9W	46.5W
	Power Factor	0.95	0.95
	Running Current	0.15A	0.21A
	Inrush Current (Std)	33.0A (250us)	33.0A (250us)
	Inrush Current (Dim)	22.4A (176us)	29.0A (155us)
	Efficacy	138 lm/W	131 lm/W
	Emergency Output (BLF)	N/A	N/A

4	Neutral White LED (4000K)	CRI 80	
		29W	43W
	Lumen Output	5295 lm	7385 lm
	LOR	0.87	0.87
	CRI	80	80
	Total Power	31.9W	46.5W
	Power Factor	0.95	0.95
	Running Current	0.15A	0.21A
	Inrush Current (Std)	33.0A (250us)	33.0A (250us)
	Inrush Current (Dim)	22.4A (176us)	29.0A (155us)
	Efficacy	144 lm/W	138 lm/W
	Emergency Output (BLF)	N/A	N/A

- Precision Extruded Aluminium design
- Opal polycarbonate diffuser
- Plug and socket connections for quick assembly on link systems
- Available in a choice of lumen outputs, delivering up to 7385 lumens
- Efficacies up to 144 lm/W
- Outstanding performance with an LOR of 0.87
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview


Infinitas® Micro Wallwasher Direct

LED	29W LED	1120mm	1140	LED	29	+	562
43W LED	1120mm	1140	LED	43	+	562	

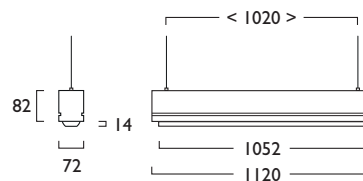

230V 50Hz IP 20 80° 4.4 kg

Photometrics

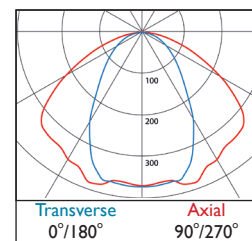

562 DLOR: 0.87

- IU** Link Suspended **IW** Link Surface **IY** Link Recessed Bezel **IZ** Link Recessed Bezel Free
- IJ** Solo Suspended **IL** Solo Surface **IQ** Solo Recessed Bezel **IR** Solo Recessed Bezel Free
- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim
- L** DALI Bluetooth

- 3** Warm (3000K) **4** Neutral (4000K)
- 1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)
- 303** 2x5m Suspensions (wires only)