




# Link

## Suspended & Surface


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Neatly integrates general, accent and ambient lighting
- Engineering excellence with contemporary styling
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview





**Link Suspended**




**+ Light Spill**



**Link Surface**




**Link Surface + Light Spill**





# Solo

## Suspended & Surface


- Designed to complement Link Modules
- Slim, sleek design enhanced by choice of surface and suspended options
- Choice of light sources available
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview





**Solo Suspended**




**+ Light Spill**




**Solo Surface**



**Solo Surface + Light Spill**



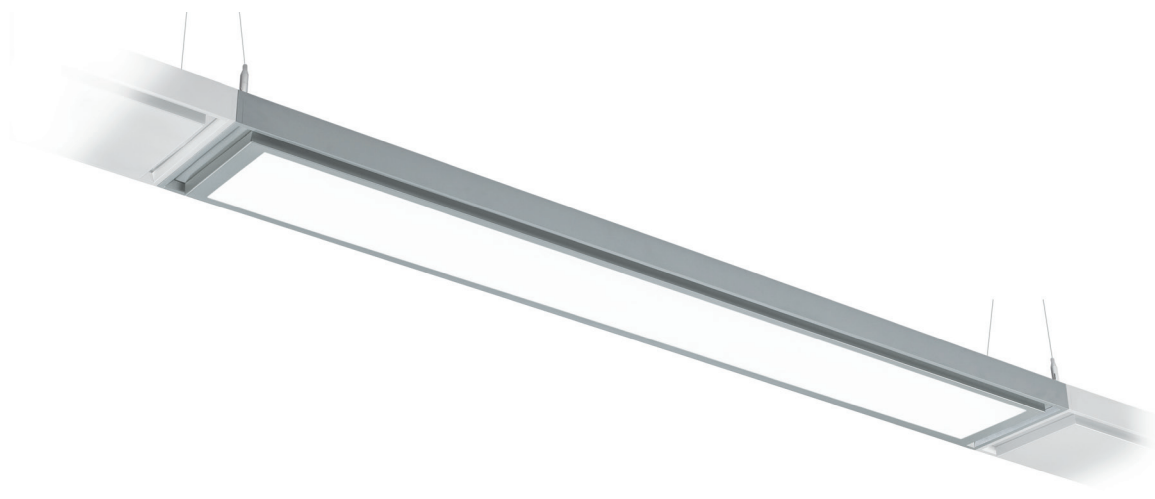

3	Warm White LED (3000K)	CRI 80	
		25W	46W
	Lumen Output	4232 lm	7390 lm
	LOR	0.86	0.86
	CRI	80	80
	Total Power	25.7W	49.3W
	Power Factor	0.98	0.95
	Running Current	0.11A	0.23A
	Inrush Current (Std)	32.0A (240us)	33.0A (250us)
	Inrush Current (Dim)	29.0A (180us)	40.0A (178us)
	Efficacy	141 lm/W	128 lm/W
	Emergency Output (BLF)	465 lm (11%)	443 lm (6%)

4	Neutral White LED (4000K)	CRI 80	
		25W	46W
	Lumen Output	4428 lm	7732 lm
	LOR	0.86	0.86
	CRI	80	80
	Total Power	25.7W	49.3W
	Power Factor	0.98	0.95
	Running Current	0.11A	0.23A
	Inrush Current (Std)	32.0A (240us)	33.0A (250us)
	Inrush Current (Dim)	29.0A (180us)	40.0A (178us)
	Efficacy	148 lm/W	134 lm/W
	Emergency Output (BLF)	487 lm (11%)	463 lm (6%)


- Contemporary LED Module with high quality Opal polycarbonate diffuser
- Available in a choice of lumen outputs, delivering up to 7732 lumens
- Efficacies up to 148 lm/W
- Outstanding LOR of 0.86, light distribution for general lighting applications
- Diffuser is TP(b) rated
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 2x 2m Twin suspension wires and chrome clutches for ease of adjustment
- Wireless Lighting Control available, see Connected video for full overview

## Linear Light4 Opal

### Link & Solo Modules

LED	25W LED	1250mm	050	LED	25	+	383	384
	46W LED	1250mm	050	LED	46	+	383	384

220V	IP	LA, LB, LD, LE	LC, LG, LF, LH	8.9 kg
50Hz	20	1227mm	1148mm	

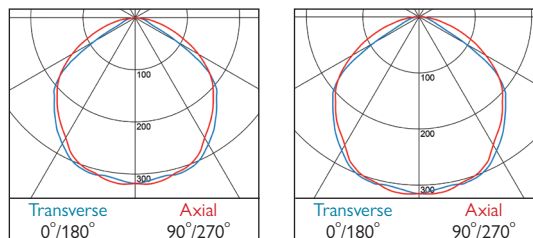

383	DLOR: 0.86	384	DLOR: 0.85 ULOR: 0.01
-----	------------	-----	-----------------------

<b>LA</b> Link Suspended	<b>LB</b> Link + Light Spill Suspended
<b>LC</b> Link Surface	<b>LG</b> Link + Light Spill Surface
<b>LD</b> Solo Suspended	<b>LE</b> Solo + Light Spill Suspended
<b>LF</b> Solo Surface	<b>LH</b> Solo + Light Spill Surface

### Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

- 3** Warm (3000K)    **4** Neutral (4000K)
- 1** White (RAL 9010)    **2** Urban Graphite (RAL 7046)    **3** Black (RAL 9005)
- 144** 2x 5m Twin Suspensions (wires only)