

Figures shown below are based on Gear Type - A Internal Driver

| 3 | Warm White LED (3000K) | CRI 80 | | | |
|---|------------------------|--------------|--------------|--------------|--------------|
| | | 5W | 7W | 12W | 17W |
| | Lumen Output | 880 lm | 1320 lm | 2029 lm | 2808 lm |
| | LOR | 0.90 | 0.90 | 0.90 | 0.90 |
| | CRI | 80 | 80 | 80 | 80 |
| | Total Power | 5.3W | 8.0W | 12.6W | 18.3W |
| | Power Factor | 0.68 | 0.76 | 0.86 | 0.83 |
| | Running Current | 0.02A | 0.03A | 0.05A | 0.07A |
| | Inrush Current (Std) | 2.9A (60us) | 2.9A (60us) | 2.9A (60us) | 4.0A (60us) |
| | Inrush Current (Dim) | 2.71A (38us) | 2.71A (38us) | 2.71A (38us) | 3.31A (43us) |
| | Efficacy | 149 lm/W | 148 lm/W | 144 lm/W | 138 lm/W |
| | Emergency Output (BLF) | 343 lm (39%) | 343 lm (26%) | 337 lm (16%) | 337 lm (12%) |

| 4 | Neutral White LED (4000K) | CRI 80 | | | |
|---|---------------------------|--------------|--------------|--------------|--------------|
| | | 5W | 7W | 12W | 17W |
| | Lumen Output | 917 lm | 1376 lm | 2116 lm | 2928 lm |
| | LOR | 0.90 | 0.90 | 0.90 | 0.90 |
| | CRI | 80 | 80 | 80 | 80 |
| | Total Power | 5.3W | 8.0W | 12.6W | 18.3W |
| | Power Factor | 0.68 | 0.76 | 0.86 | 0.83 |
| | Running Current | 0.02A | 0.03A | 0.05A | 0.07A |
| | Inrush Current (Std) | 2.9A (60us) | 2.9A (60us) | 2.9A (60us) | 4.0A (60us) |
| | Inrush Current (Dim) | 2.71A (38us) | 2.71A (38us) | 2.71A (38us) | 3.31A (43us) |
| | Efficacy | 155 lm/W | 154 lm/W | 151 lm/W | 144 lm/W |
| | Emergency Output (BLF) | 358 lm (39%) | 358 lm (26%) | 352 lm (16%) | 337 lm (12%) |

Microbezel® 300 Pendant



LED CRI 80

| | | | | | |
|-----|-----|--------|-----|----|---|
| 5W | LED | PN1607 | LED | 05 | + |
| 7W | LED | PN1607 | LED | 07 | + |
| 12W | LED | PN1607 | LED | 12 | + |
| 17W | LED | PN1607 | LED | 17 | + |

■ Add required Reflector to code from list shown over (Options - Reflector)

- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction & extrusion
- Lumen outputs from 880 to 2928 lumens
- Range of Reflector options available, Chrome, Matt, Dark & Gold
- Single point Zhaga Book 3 LED
- Choice of Diffuser options for customisation
- Efficacies up to 155 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Complementary Microbezel® Surface versions available
- Wireless Lighting Control available, see Connected video for full overview
- Alternative CRI 90 options available (PN1608)




- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

■ 3 Warm (3000K) 4 Neutral (4000K)

■ 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

■ Reflector and Polycarbonate Options - Examples Shown on page 2

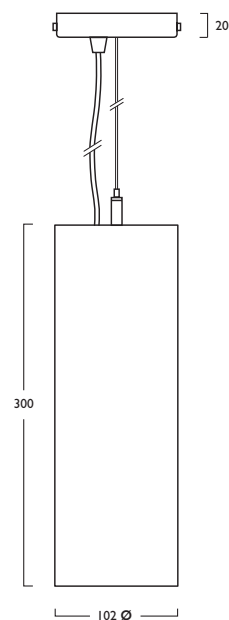

230V
50Hz

IP 20

50mm

1.3 kg

Microbezel® 300 Pendant

Options


■ Reflector / Polycarbonate Options



574 Chrome - Narrow Beam
045 Chrome - Medium Beam
575 Chrome - Wide Beam



620 Semi Matt - Wide Beam



621 Dark Light - Narrow Beam
622 Dark Light - Medium Beam
623 Dark Light - Wide Beam



624 Gold - Narrow Beam
625 Gold - Medium Beam
626 Gold - Wide Beam

| Reflector | | | ▲ ▲ | | ▲ ▲ | | | | |
|------------|--------------------------|-----|--------|--------|------------|--------------------|-----|-----|-----|
| | | | CRI 80 | CRI 90 | CRI 80 | CRI 90 | | | |
| 574 | Chrome - Narrow Beam | 20° | 568 | 571 | 624 | Gold - Narrow Beam | 26° | 715 | 718 |
| 045 | Chrome - Medium Beam | 38° | 567 | 570 | 625 | Gold - Medium Beam | 52° | 716 | 719 |
| 575 | Chrome - Wide Beam | 56° | 569 | 572 | 626 | Gold - Wide Beam | 74° | 717 | 720 |
| 620 | Semi Matt - Wide Beam | 72° | 705 | 708 | | | | | |
| 621 | Dark Light - Narrow Beam | 26° | 709 | 712 | | | | | |
| 622 | Dark Light - Medium Beam | 62° | 710 | 713 | | | | | |
| 623 | Dark Light - Wide Beam | 84° | 711 | 714 | | | | | |



507 Flush Clear (IP44)




508 Flush Opal (IP44)




563 Cylo Etched Ice

Microbezel® 300 Pendant


Photometrics

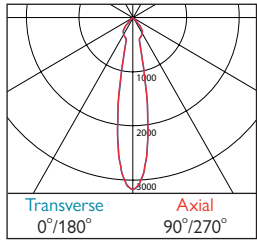


568 / 571 DLOR: 0.91
Chrome - Narrow Beam

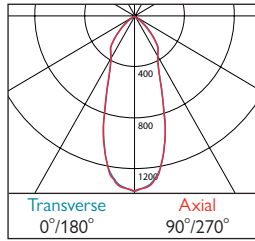


567 / 570 DLOR: 0.91
Chrome - Medium Beam

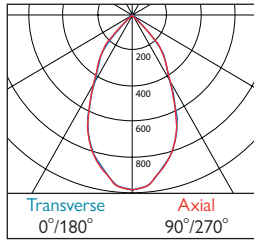


569 / 572 DLOR: 0.91
Chrome - Wide Beam

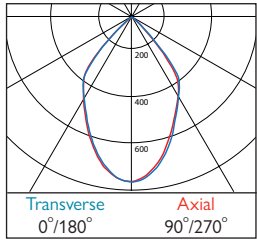


705 / 708 DLOR: 0.83
Semi Matt - Narrow Beam

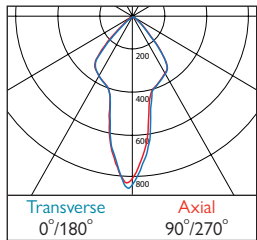


709 / 712 DLOR: 0.65
Dark Light - Narrow Beam

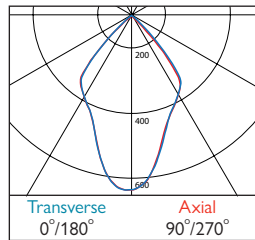


710 / 713 DLOR: 0.68
Dark Light - Medium Beam

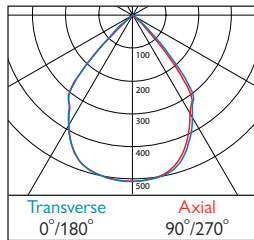


711/714 DLOR: 0.67
Dark Light - Wide Beam

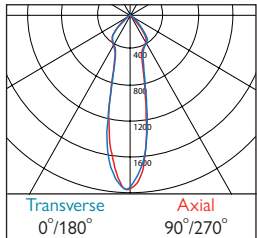

715 / 718 DLOR: 0.85
Gold - Narrow Beam

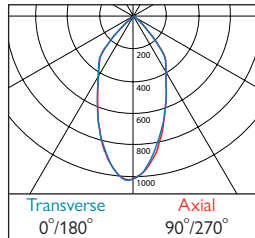

716 / 719 DLOR: 0.84
Gold - Medium Beam

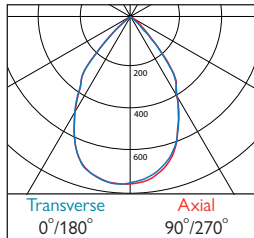

717 / 720 DLOR: 0.84
Gold - Wide Beam