



|                        | CRI 80 | Warm White LED (3000K) |               |               | Neutral White LED (4000K) |               |               |
|------------------------|--------|------------------------|---------------|---------------|---------------------------|---------------|---------------|
|                        |        | 17W                    | 24W           | 29W           | 22W                       | 30W           | 36W           |
| Lumen Output           |        | 3264 lm                | 4338 lm       | 5063 lm       | 4080 lm                   | 5422 lm       | 6329 lm       |
| LOR                    |        | 0.75                   | 0.75          | 0.75          | 0.75                      | 0.75          | 0.75          |
| CRI                    |        | 80                     | 80            | 80            | 80                        | 80            | 80            |
| Total Power            |        | 19.2W                  | 26.7W         | 31.9W         | 23.7W                     | 33.3W         | 39.8W         |
| Power Factor           |        | 0.81                   | 0.96          | 0.97          | 0.89                      | 0.95          | 0.95          |
| Running Current        |        | 0.07A                  | 0.11A         | 0.14A         | 0.09A                     | 0.14A         | 0.17A         |
| Inrush Current (Std)   |        | 5.33A (38us)           | 15A (250us)   | 15.0A (250us) | 28A (150us)               | 25.0A (280us) | 25.0A (280us) |
| Inrush Current (Dim)   |        | 22.4A (176us)          | 22.4A (176us) | 22.4A (176us) | 22.4A (176us)             | 22.4A (176us) | 22.4A (176us) |
| Efficacy               |        | 127 lm/W               | 121 lm/W      | 119 lm/W      | 129 lm/W                  | 122 lm/W      | 119 lm/W      |
| Emergency Output (BLF) |        | 455 lm (14%)           | 455 lm (10%)  | 455 lm (9%)   | 327 lm (8%)               | 327 lm (6%)   | 327 lm (5%)   |

## Skola® Pendant



### LED

| Wattage | LED | Length | Part No. | Beam Angle | Life | Temp |
|---------|-----|--------|----------|------------|------|------|
| 17W     | LED | 1203mm | PN1633   | —          | 17   | 72.5 |
| 24W     | LED | 1203mm | PN1633   | —          | 24   | 72.5 |
| 29W     | LED | 1203mm | PN1633   | —          | 29   | 72.5 |
| 22W     | LED | 1483mm | PN1635   | —          | 22   | 72.6 |
| 30W     | LED | 1483mm | PN1635   | —          | 30   | 72.6 |
| 36W     | LED | 1483mm | PN1635   | —          | 36   | 72.6 |

- Lumen outputs from 3264 to 6751 lumens
- Efficacies up to 130 lm/W
- Life expectancy 72,000 hours (L80 B10)
- UGR compliant across all wattages, rated at UGR 19 or less
- IP44 and IK08 rated
- Colour stability within 3 MacAdams
- Available with integral Bluetooth
- Complementary Surface version available
- Wireless Lighting Control available, see Connected video for full overview
- Tamper proof end caps option available
- Tool free Gear Tray and Polycarbonate diffuser for quick and easy installation
- Supplied with 2 x 2m Twin Suspensions and chrome clutches as standard

### Gear types F & G must be operated through a DSI

|                                  |                                     |
|----------------------------------|-------------------------------------|
| <b>A</b> Integral Driver/Remote  | <b>S</b> DALI Dim                   |
| <b>E</b> Emergency               | <b>T</b> DALI Dim + Emergency       |
| <b>F</b> Digital Dim             | <b>C</b> DALI Dim + DALI Emergency  |
| <b>G</b> Digital Dim + Emergency | <b>L</b> DALI Bluetooth             |
| <b>J</b> Switch Dim              | <b>M</b> DALI Bluetooth + Emergency |
| <b>K</b> Switch Dim + Emergency  |                                     |

3 Warm (3000K) 4 Neutral (4000K)


1 White (RAL 9010)

144 2x 5m Twin Suspension (wire only)


640 Tamper Proof End Caps




## Skola® Pendant

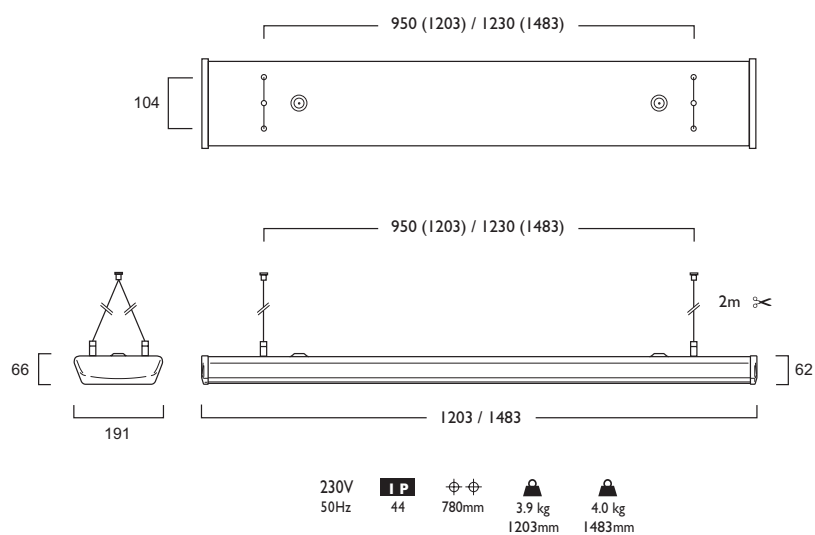

### Photometrics

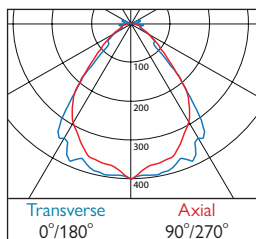

**725** DLOR: 0.75

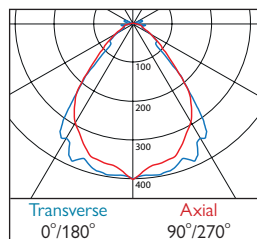

**726** DLOR: 0.75