


Wallwasher Micro



LED
 6W LED ID1629 LED 06 1 358

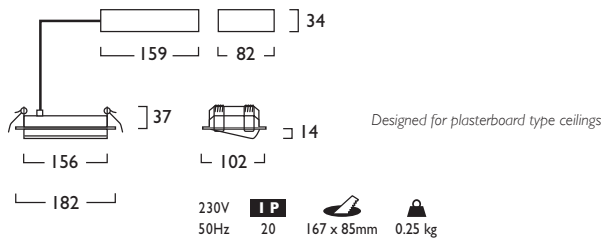

3	Warm White LED (3000K)	CRI 80 6W
	Lumen Output	964 lm
	LOR	0.82
	CRI	80
	Total Power	6.8W
	Power Factor	0.93
	Running Current	0.03A
	Inrush Current (Std)	4.3A (32us)
	Inrush Current (Dim)	10.0A (80us)
	Efficacy	116 lm/W
	Emergency Output (BLF)	N/A
4	Neutral White LED (4000K)	CRI 80 6W
	Lumen Output	1013 lm
	LOR	0.82
	CRI	80
	Total Power	6.8W
	Power Factor	0.93
	Running Current	0.03A
	Inrush Current (Std)	4.4A (32us)
	Inrush Current (Dim)	10.0A (80us)
	Efficacy	122 lm/W
	Emergency Output (BLF)	N/A

- Unique extruded aluminium 'drop down' asymmetric design
- Available in a choice of lumen outputs, delivering up to 1013 lumens
- Efficacies up to 122 lm/W
- Delivers illumination directly into the wall and ceiling junction
- Colour stability within 3 MacAdams
- Life expectancy in excess of 72,000 hours (L80 B10)
- Wireless Lighting Control available, see Connected video for full overview

Photometrics

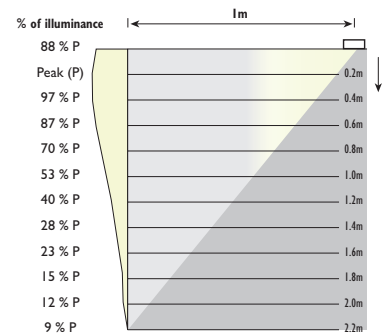

Gear type F must be operated through a DSI

- A Integral Driver/Remote
- F Digital Dim
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales