


Wallwasher Midi

LED	7W	10W	14W
LED ID1631	LED ID1631	LED ID1631	LED ID1631
	07	10	14
	1	1	1
	358	358	358

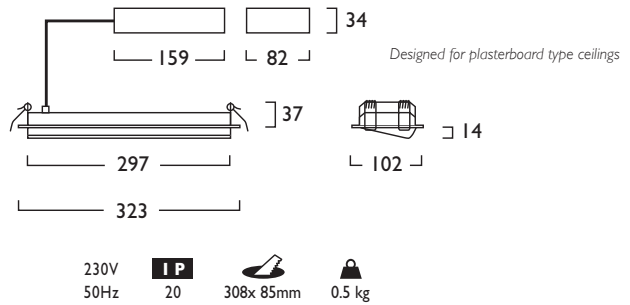

3	Warm White LED (3000K)	CRI 80	7W	10W	14W
	Lumen Output		1224 lm	1761 lm	2339 lm
	LOR		0.83	0.83	0.83
	CRI		80	80	80
	Total Power		7.7W	11.4W	14.9W
	Power Factor		0.55	0.55	0.98
	Running Current		0.02A	0.03A	0.06A
	Inrush Current (Std)		10.0A (115us)	14.5A (114us)	20.0A (200us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (80us)	10.0A (80us)
	Efficacy		130 lm/W	128 lm/W	130 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80	7W	10W	14W
	Lumen Output		1287 lm	1852 lm	2460 lm
	LOR		0.83	0.83	0.83
	CRI		80	80	80
	Total Power		7.7W	11.4W	14.9W
	Power Factor		0.55	0.55	0.98
	Running Current		0.02A	0.03A	0.06A
	Inrush Current (Std)		10.0A (115us)	14.5A (114us)	20.0A (200us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (80us)	10.0A (80us)
	Efficacy		136 lm/W	134 lm/W	137 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A

- Unique extruded aluminium 'drop down' asymmetric design
- Available in a choice of lumen outputs, delivering up to 2460 lumens
- Efficacies up to 137 lm/W
- Colour stability within 3 MacAdams
- Delivers illumination directly into the wall and ceiling junction
- Life expectancy in excess of 72,000 hours (L80 B10)
- Wireless Lighting Control available, see Connected video for full overview

Gear type F must be operated through a DSI

- A** Integral Driver/Remote
 - F** Digital Dim
 - J** Switch Dim
 - S** DALI Dim
 - L** DALI Bluetooth
- 3 Warm (3000K) ■ 4 Neutral (4000K)
- I White (RAL 9010)
- Interconnection options available contact Sales

Photometrics

