




Link

Suspended & Surface


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Neatly integrates general, accent and ambient lighting
- Engineering excellence with contemporary styling
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Link Suspended




+ Light Spill



Link Surface




Link Surface + Light Spill





Solo

Suspended & Surface


- Designed to complement Link Modules
- Slim, sleek design enhanced by choice of surface and suspended options
- Choice of light sources available
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Solo Suspended




+ Light Spill




Solo Surface



Solo Surface + Light Spill



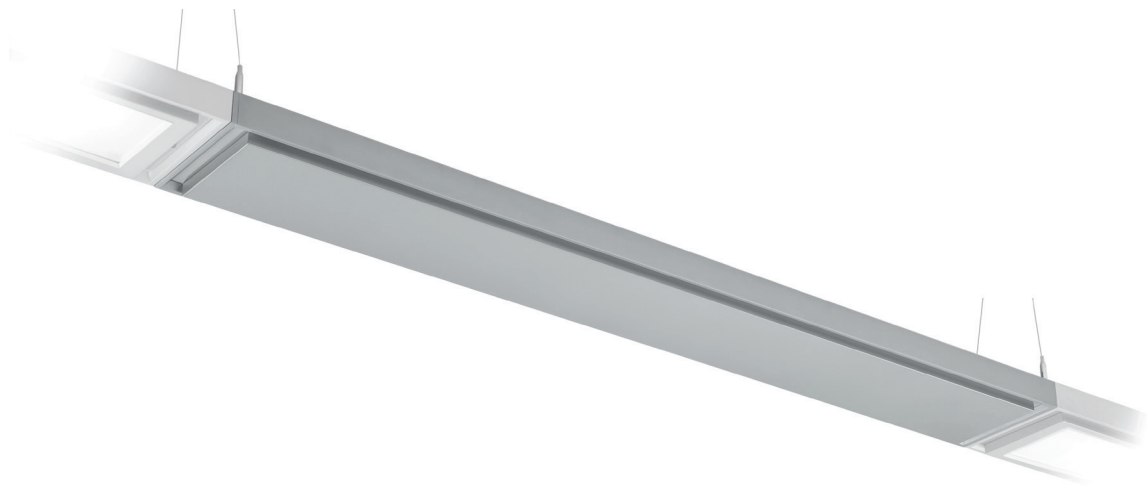

Linear Light⁴ Spacer/Components

Link Modules

	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5
Spacer (inc. seven wire harness)	205mm	LL 027	A SPA016	—	—
Spacer (inc. seven wire harness)	600mm	640	A SPA016	—	+
Spacer (inc. seven wire harness)	750mm	028	A SPA016	—	+
Spacer (inc. seven wire harness)	1250mm	660	A SPA016	—	+
Spacer (inc. seven wire harness)	1500mm	029	A SPA016	—	+

230V 50Hz	IP 20	LL027 -	LA640 577mm	LA028 727mm	LA660 1227mm	LA029 1477mm
		LC/LG640 300mm	LC/LG028 450mm	LC/LG660 1148mm	LC/LG029 900mm	
		027 1.4 kg	640 3.5 kg	028 4.4 kg	660 6.7 kg	029 8.0 kg

Alternative sizes are available on request

PIR Spacer

	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5
Spacer (inc. seven wire harness)	205mm	LL 036	A PIR016	—	—
Spacer (inc. seven wire harness)	600mm	708	A PIR016	—	+
Spacer (inc. seven wire harness)	750mm	037	A PIR016	—	+
Spacer (inc. seven wire harness)	1250mm	717	A PIR016	—	+
Spacer (inc. seven wire harness)	1500mm	038	A PIR016	—	+

230V 50Hz	IP 20	LL036 -	LA708 577mm	LA037 727mm	LA717 1227mm	LA038 1477mm
		LC/LG708 300mm	LC/LG037 450mm	LC/LG717 1148mm	LC/LG038 900mm	
		036 1.5 kg	708 3.6 kg	037 4.5 kg	717 6.8 kg	038 8.1 kg

PIR Spacer only suitable for use with Luminaires with Gear Types F, G


Connectors/End Cap

	Icon 1	Icon 2	Icon 3
L Connector	LL032	A CON016	—
T Connector	LL033	A CON016	—
X Connector	LL034	A CON016	—
Module End Cap	LL035	X CAP000	—

Connectors

L PIR Connector	LL039	A PIR016	—
T PIR Connector	LL040	A PIR016	—
X PIR Connector	LL041	A PIR016	—

PIR Connector only suitable for use with Luminaires with Gear Types F, G
A single PIR can control up to four LED Modules


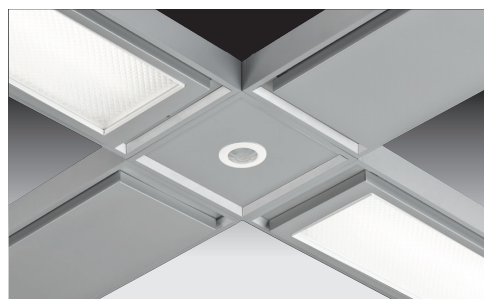


An inbuilt PIR Detector provides individual control via various operating modes to improve energy efficiency.

230V
50Hz

IP
20

1.5 kg

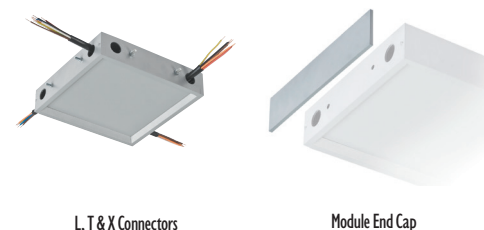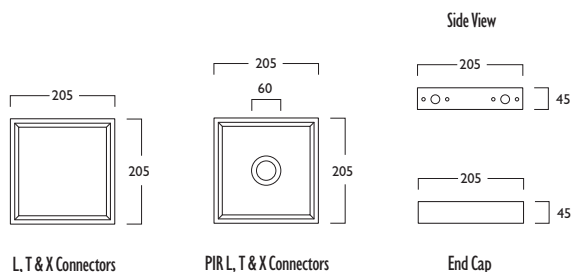

- LA Link Suspended
- LC Link Surface
- LL PIR Blank Spacer
- A No Control Gear 230V
- X Non Electrical Component
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- 144 2x 5m Twin suspensions (wires only)