



	CRI 80	Warm White LED (3000K)			Neutral White LED (4000K)		
		17W	24W	29W	22W	30W	36W
Lumen Output		3264 lm	4338 lm	5063 lm	4080 lm	5422 lm	6329 lm
LOR		0.82	0.82	0.82	0.82	0.82	0.82
CRI		80	80	80	80	80	80
Total Power		19.2W	26.7W	31.9W	23.7W	33.3W	39.8W
Power Factor		0.81	0.96	0.97	0.89	0.95	0.95
Running Current		0.07A	0.11A	0.14A	0.09A	0.14A	0.17A
Inrush Current (Std)		5.33A (38us)	15A (250us)	15.0A (250us)	28A (150us)	25.0A (280us)	25.0A (280us)
Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)
Efficacy		139 lm/W	133 lm/W	130 lm/W	141 lm/W	133 lm/W	130 lm/W
Emergency Output (BLF)		455 lm (14%)	455 lm (10%)	455 lm (9%)	327 lm (8%)	327 lm (6%)	327 lm (5%)

## Tutor® Pendant

☀️ 📏 🔌 🔧 Ⓚ ⚡

LED

Wattage	LED	Length	Part No.	LED	Length	Life
17W	LED	1203mm	PN1666	LED	17	760
24W	LED	1203mm	PN1666	LED	24	760
29W	LED	1203mm	PN1666	LED	29	760
22W	LED	1483mm	PN1668	LED	22	761
30W	LED	1483mm	PN1668	LED	30	761
36W	LED	1483mm	PN1668	LED	36	761

- Lumen outputs from 3264 to 6751 lumens
- Efficacies up to 150 lm/W
- Life expectancy 72,000 hours (L80 B10)
- UGR compliant across all wattages, rated at UGR 19 or less
- IP44 and IK08 rated with colour stability within 3 MacAdams
- Complementary Surface version available
- Tool Free extruded Polycarbonate Diffuser and Gear Tray for quick and easy installation
- Wireless Lighting Control available, see Connected video for full overview
- Available with integral Bluetooth
- Tamper proof end caps option available
- Supplied with 2 x 2m Twin Suspensions and chrome clutches as standard
- CRI90 options available PN1667 & PN1669

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

**3** Warm (3000K)    **4** Neutral (4000K)


**1** White (RAL 9010)

**144** 2x 5m Twin Suspension (wire only)


**640** Tamper Proof End Caps



## Tutor® Pendant

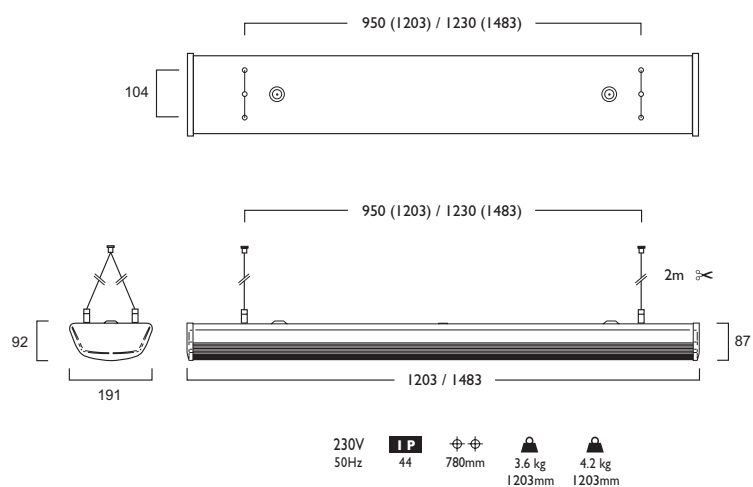

### Photometrics

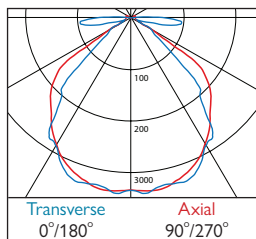

**760-761** DLOR: 0.82