

Figures shown below are based on Gear Type - A Internal Driver

3	Warm White LED (3000K)	CRI 80				CRI 90			
		5W	7W	12W	17W	5W	7W	12W	17W
	Lumen Output	880 lm	1320 lm	2029 lm	2856 lm	745 lm	1118 lm	1719 lm	2419 lm
	LOR	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
	CRI	80	80	80	80	90	90	90	90
	Total Power	5.6W	8.6W	13.1W	18.2W	5.6W	8.6W	13.1W	18.2W
	Power Factor	0.92	0.92	0.90	0.90	0.92	0.92	0.90	0.90
	Running Current	0.03A	0.04A	0.06A	0.09A	0.03A	0.04A	0.06A	0.09A
	Inrush Current (Std)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)
	Efficacy	141 lm/W	138 lm/W	139 lm/W	141 lm/W	119 lm/W	117 lm/W	118 lm/W	119 lm/W
	Emergency Output (BLF)	466 lm (53%)	448 lm (34%)	446 lm (22%)	456 lm (16%)	394 lm (53%)	380 lm (34%)	378 lm (22%)	387 lm (16%)

4	Neutral White LED (4000K)	CRI 80				CRI 90			
		5W	7W	12W	17W	5W	7W	12W	17W
	Lumen Output	917 lm	1376 lm	2116 lm	2978 lm	783 lm	1175 lm	1806 lm	2542 lm
	LOR	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
	CRI	80	80	80	80	90	90	90	90
	Total Power	5.6W	8.6W	13.1W	18.2W	5.6W	8.6W	13.1W	18.2W
	Power Factor	0.92	0.92	0.90	0.90	0.92	0.92	0.90	0.90
	Running Current	0.03A	0.04A	0.06A	0.09A	0.03A	0.04A	0.06A	0.09A
	Inrush Current (Std)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)
	Efficacy	147 lm/W	144 lm/W	145 lm/W	147 lm/W	125 lm/W	122 lm/W	124 lm/W	125 lm/W
	Emergency Output (BLF)	486 lm (53%)	467 lm (34%)	465 lm (22%)	476 lm (16%)	414 lm (53%)	399 lm (34%)	397 lm (22%)	406 lm (16%)

Microbezel®

LED CRI 80						LED CRI 90					
5W	LED	ID1294	LED	05	+	5W	LED	ID1295	LED	05	+
7W	LED	ID1294	LED	07	+	7W	LED	ID1295	LED	07	+
12W	LED	ID1294	LED	12	+	12W	LED	ID1295	LED	12	+
17W	LED	ID1294	LED	17	+	17W	LED	ID1295	LED	17	+

Add the required Reflector to code from list shown on page 2 (Reflector - Options)

- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction
- Range of Reflector options available, Chrome, Matt, Dark & Gold
- Single point Zhaga Book 3 LED
- Choice of Diffuser options for customisation
- Choice of outputs up to 2978 lumens
- Efficacies up to 147 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview


Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector/ Polycarbonate Options - Examples Shown on page 2

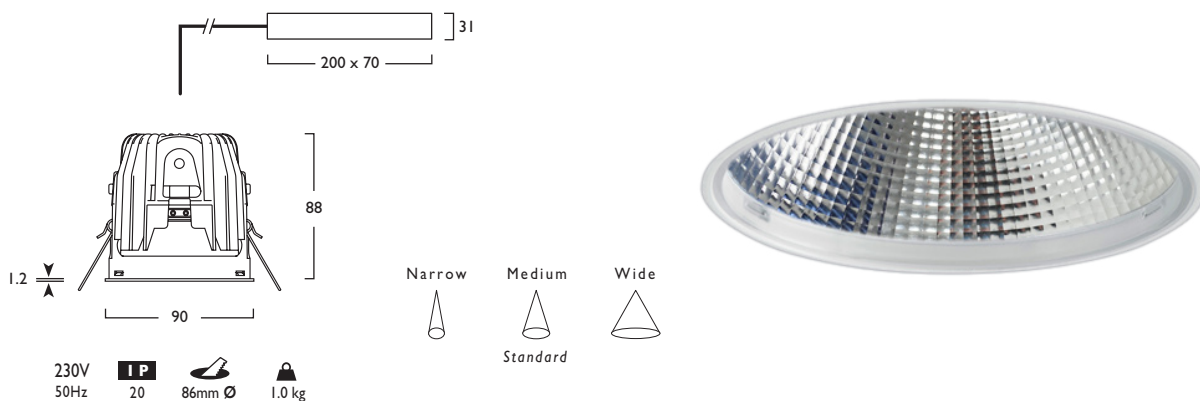

230V
50Hz

IP
20

86mm Ø

1.0 kg

Microbezel®

Options


■ Reflector / Polycarbonate Options



574 Chrome - Narrow Beam
045 Chrome - Medium Beam (STD)
575 Chrome - Wide Beam



620 Matt - Wide Beam



621 Dark Light - Narrow Beam
622 Dark Light - Medium Beam (STD)
623 Dark Light - Wide Beam



624 Gold - Narrow Beam
625 Gold - Medium Beam (STD)
626 Gold - Wide Beam

Reflector		20°	38°	56°	72°	26°	CNI 80		CNI 90	
							590	593	715	718
574	Chrome - Narrow Beam	20°	590	593	624	Gold - Narrow Beam	26°	715	718	
045	Chrome - Medium Beam	38°	589	592	625	Gold - Medium Beam	52°	716	719	
575	Chrome - Wide Beam	56°	591	594	626	Gold - Wide Beam	74°	717	720	
620	Matt - Wide Beam	72°	705	708						
621	Dark Light - Narrow Beam	26°	709	712						
622	Dark Light - Medium Beam	62°	710	713						
623	Dark Light - Wide Beam	84°	711	714						



507 Flush Clear (IP44)




508 Flush Opal (IP44)




563 Cylo Etched Ice


Photometrics




590 / 593 DLOR: 0.91
Chrome Reflector - Narrow Beam




589 / 592 DLOR: 0.91
Chrome Reflector - Medium Beam




591 / 594 DLOR: 0.91
Chrome Reflector - Wide Beam




705 / 708 DLOR: 0.83
Semi Matt Reflector - Narrow Beam




709 / 712 DLOR: 0.65
Dark Light Reflector - Narrow Beam




710 / 713 DLOR: 0.68
Dark Light Reflector - Medium Beam




711/714 DLOR: 0.67
Dark Light Reflector - Wide Beam



715 / 718 DLOR: 0.85
Gold Reflector - Narrow Beam



716 / 719 DLOR: 0.84
Gold Reflector - Medium Beam



717 / 720 DLOR: 0.84
Gold Reflector - Wide Beam