




	CRI 80	Warm White LED (3000K)			Neutral White LED (4000K)		
		19W	33W	46W	24W	41W	58W
Lumen Output		3604 lm	5874 lm	7956 lm	4618 lm	7526 lm	10195 lm
LOR		0.86	0.86	0.86	0.86	0.86	0.86
CRI		80	80	80	80	80	80
Total Power		20.5W	35.9W	51.0W	25.4W	44.9W	63.9W
Power Factor		0.98	0.95	0.95	0.99	0.95	0.95
Running Current		0.09A	0.16A	0.23A	0.11A	0.21A	0.29A
Inrush Current (Std)		32.0A (240us)	11.0A (38us)	15.0A (100us)	30.0A (253us)	11.0A (38us)	16.0A (40us)
Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)	23.0A (174us)	23.0A (174us)	23.0A (174us)
Efficacy		151 lm/W	140 lm/W	134 lm/W	156 lm/W	144 lm/W	137 lm/W
Emergency Output (BLF)		504 lm (14%)	469 lm (8%)	477 lm (6%)	507 lm (11%)	451 lm (6%)	407 lm (4%)

Aviata Pendant

LED	Power	Length	Part No.	Color	Beam Angle	Output	Emergency
19W LED	1278mm	PN1222	LED	19	+	561	
33W LED	1278mm	PN1222	LED	33	+	561	
46W LED	1278mm	PN1222	LED	46	+	561	
24W LED	1573mm	PN1600	LED	24	+	608	
41W LED	1573mm	PN1600	LED	41	+	608	
58W LED	1573mm	PN1600	LED	58	+	608	

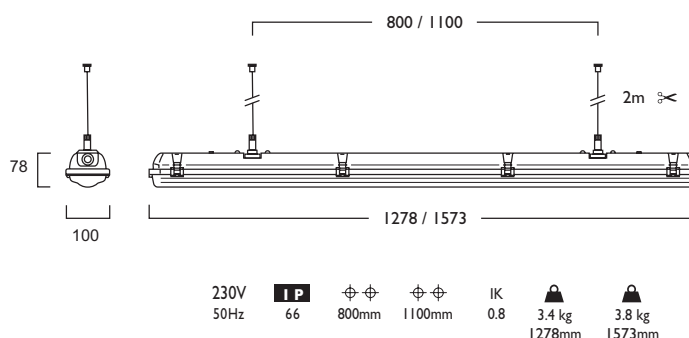

- Glass Reinforced Polyester housing (Light Grey RAL 7035)
- Injection moulded opal Polycarbonate diffuser with stainless steel clips
- IP66 and IK08 rated, suitable for exterior use only under canopy
- Suitable for trunking mounting through 20mm knockouts
- Available in a choice of lumen output up to 10720 lumens

- Lumen outputs from 3604 to 10720 lumens
- Efficacies upto 164 lm/W
- Life expectancy 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Complementary Surface version
- Wireless Lighting Control available, see Connected video for full overview

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

331 2x 5m Suspension (wire only)

Photometrics

