




	3 Warm White LED (3000K)			4 Neutral White LED (4000K)		
	CRI 80	19W	33W	46W	24W	41W
Lumen Output	3604 lm	5874 lm	7956 lm	4618 lm	7526 lm	10195 lm
LOR	0.86	0.86	0.86	0.86	0.86	0.86
CRI	80	80	80	80	80	80
Total Power	20.5W	35.9W	51.0W	25.4W	44.9W	63.9W
Power Factor	0.98	0.95	0.95	0.99	0.95	0.95
Running Current	0.09A	0.16A	0.23A	0.11A	0.21A	0.29A
Inrush Current (Std)	32.0A (240us)	11.0A (38us)	15.0A (100us)	30.0A (253us)	11.0A (38us)	16.0A (40us)
Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	22.4A (176us)	23.0A (174us)	23.0A (174us)	23.0A (174us)
Efficacy	151 lm/W	140 lm/W	134 lm/W	156 lm/W	144 lm/W	137 lm/W
Emergency Output (BLF)	504 lm (14%)	469 lm (8%)	477 lm (6%)	507 lm (11%)	451 lm (6%)	407 lm (4%)

Aviata Surface

LED	19W	33W	46W	24W	41W	58W
LED	1278mm	1573mm	1573mm	1278mm	1573mm	1573mm
SM	SM1222	SM1600	SM1600	SM1222	SM1600	SM1600
LED	19	33	46	24	41	58
Length	561	608	608	561	608	608

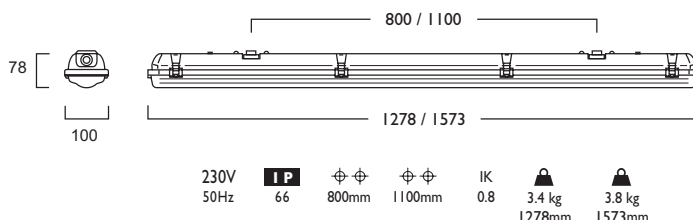


- Glass Reinforced Polyester housing (Light Grey RAL 7035)
- Injection moulded opal Polycarbonate diffuser with stainless steel clips
- IP66 (all mounting orientations) and IK08 rated, suitable for exterior use only under canopy
- Suitable for trunking mounting through 20mm knockouts
- Available in a choice of lumen output up to 10720 lumens
- Efficacies up to 164 lm/W
- Life expectancy 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Complementary Pendant version available
- Wireless Lighting Control available, see Connected video for full overview

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

Photometrics

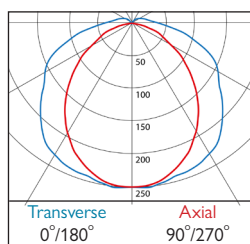

561/608 DLOR: 0.86

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk 03/2024 - V4

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

