

Edj 1200 Shown

**Edj 1200 Pendant**

	CRI 80	
	37W	46W
<b>3 Warm White LED (3000K)</b>		
Lumen Output	6648	8141
LOR	0.62	0.62
CRI	80	80
Total Power	41W	51.2W
Power Factor	0.97	0.97
Running Current	0.19A	0.23A
Inrush Current (Std)	20A (90us)	20A (90us)
Inrush Current (Dim)	31.2A (182us)	31.2A (182us)
Efficacy	100lm/W	98lm/W
Emergency Output (BLF)	360 (5%)	360 (4%)

**Edj 600 Pendant**

	CRI 80	
	18W	22W
<b>3 Warm White LED (3000K)</b>		
Lumen Output	3138	3883
LOR	0.62	0.62
CRI	80	80
Total Power	19.3W	24.3W
Power Factor	0.93	0.95
Running Current	0.09A	0.11A
Inrush Current (Std)	4.97A (100us)	4.97A (100us)
Inrush Current (Dim)	13.84A (282us)	13.84A (282us)
Efficacy	100lm/W	99lm/W
Emergency Output (BLF)	390 (12%)	390 (10%)

	CRI 80	
	37W	46W
<b>4 Neutral White LED (4000K)</b>		
Lumen Output	7062	8649
LOR	0.62	0.62
CRI	80	80
Total Power	41W	51.2W
Power Factor	0.97	0.97
Running Current	0.19A	0.23A
Inrush Current (Std)	20A (90us)	20A (90us)
Inrush Current (Dim)	31.2A (182us)	31.2A (182us)
Efficacy	106lm/W	104lm/W
Emergency Output (BLF)	383 (5%)	383 (4%)

	CRI 80	
	18W	22W
<b>4 Neutral White LED (4000K)</b>		
Lumen Output	3334	4126
LOR	0.62	0.62
CRI	80	80
Total Power	19.3W	24.3W
Power Factor	0.93	0.95
Running Current	0.09A	0.11A
Inrush Current (Std)	4.97A (100us)	4.97A (100us)
Inrush Current (Dim)	13.84A (282us)	13.84A (282us)
Efficacy	107lm/W	105lm/W
Emergency Output (BLF)	414 (12%)	414 (10%)

**Edj 1200/600 Pendant**



**Edj 1200**

LED CRI 80

37W	LED	PN1212	LED	37	+	758
46W	LED	PN1212	LED	46	+	758

**Edj 600**

LED CRI 80

18W	LED	PN1359	LED	18	+	758
22W	LED	PN1359	LED	22	+	758

**Gear types F & G must be operated through a DSI**

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency


**3** Warm (3000K)   **4** Neutral (4000K)

**1** White (RAL 9010)   **2** Urban Graphite (RAL 7046)   **3** Black (RAL 9005)


- UGR<19 Compliant on all outputs
- Lumen outputs from 3138 to 8649 lumens
- Efficacies up to 107 lm/W
- Comprehensive choice of Control Gear types
- Life expectancy 54,000 hours (L90 B10), 72,000 hours (L80 B10)
- Laser etched polycarbonate diffuser providing excellent light distribution
- Complete with 2x 2m suspension wires and chrome clutches - Max 2m drop
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview
- CRI90 versions available (Edj 1200 - PN1213 & Edj 600 - PN1360)



## Edj 1200/600 Pendant

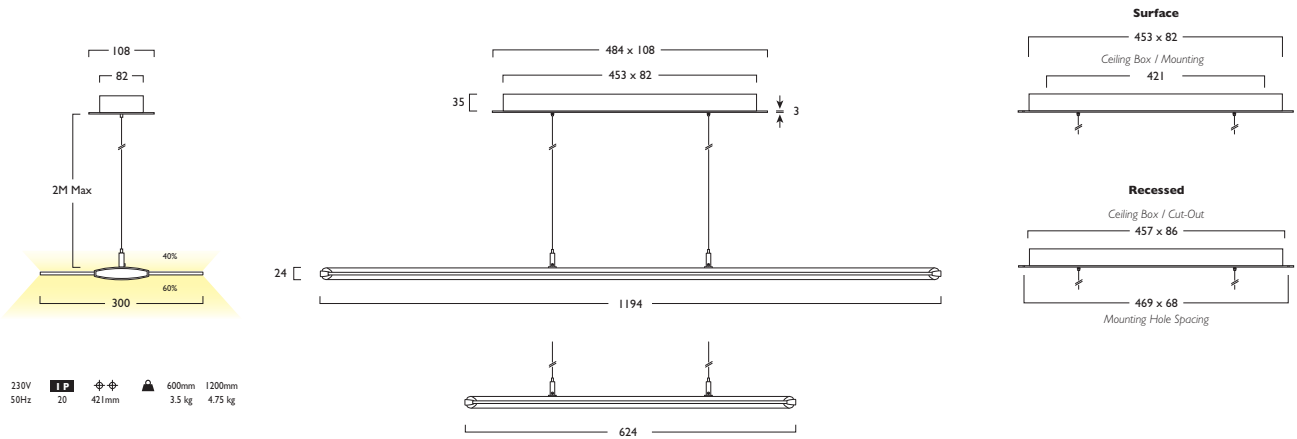

### Photometrics

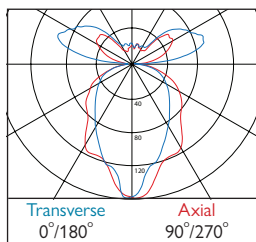

758 / 759 ULR: 0.57 DLOR: 0.60