

3 Warm White LED (3000K)		CRI 80	51W	59W	78W
Lumen Output			6402 lm	7372 lm	9700 lm
LOR			0.42	0.42	0.40
CRI			80	80	80
Total Power			57.7W	65.8W	85.0W
Power Factor			0.95	0.95	0.95
Running Current			0.03A	0.03A	0.04A
Inrush Current (Std)			25.0A (340us)	32.0A (520us)	50.0A
Inrush Current (Dim)			46.0A	46.0A	46.0A
Emergency Output (BLF)			N/A	N/A	N/A

4 Neutral White LED (4000K)		CRI 80	51W	59W	78W
Lumen Output			6435 lm	7410 lm	9750 lm
LOR			0.42	0.42	0.40
CRI			80	80	80
Total Power			57.7W	65.8W	85.0W
Power Factor			0.95	0.95	0.95
Running Current			0.03A	0.03A	0.04A
Inrush Current (Std)			25.0A (340us)	32.0A (520us)	50.0A
Inrush Current (Dim)			46.0A	46.0A	46.0A
Emergency Output (BLF)			N/A	N/A	N/A

Explora® Halo Direct



LED CRI 80

51W	LED	Micro	PN1645	LED	51	+	721
59W	LED	Midi	PN1646	LED	59	+	722
78W	LED	Maxi	PN1647	LED	78	+	723

- Elegant LED circular pendant with Chrome feature
- Available in Maxi, Midi and Micro sizes
- Lumen outputs from 6402 to 9750 lumens
- Life expectancy of 50,000hrs (L80 B10)
- Colour stability within 3 MacAdams
- Colour options apply to Driver Housing
- Wireless Lighting Control available, see Connected video for full overview

- A Integral Driver/Remote
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth


- 3 Warm (3000K) 4 Neutral (4000K)

- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005) Colour options apply to Driver Housing


- 264 3x 5m Suspensions (wires only)

Explora® Halo Direct


PRODUCT INFORMATION

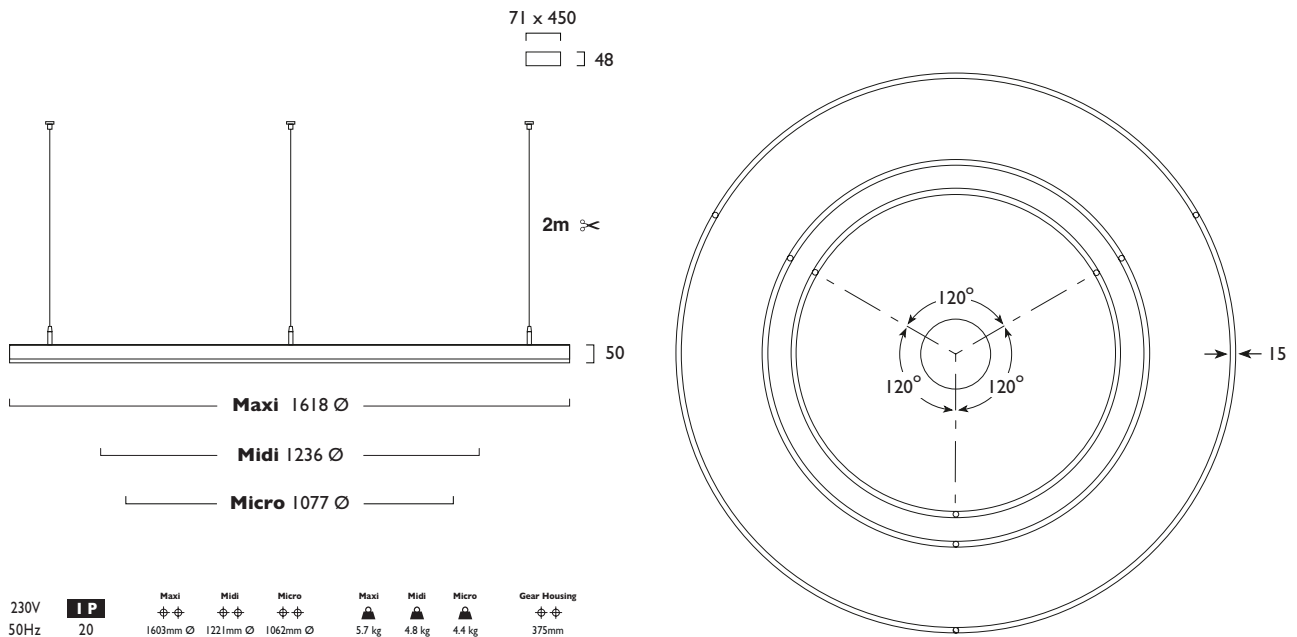


Photometrics

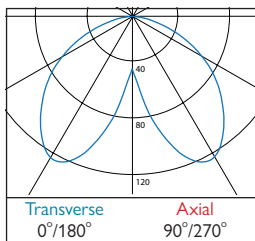

721 LOR: 0.42

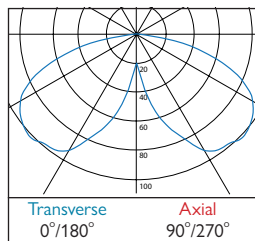

722 LOR: 0.42

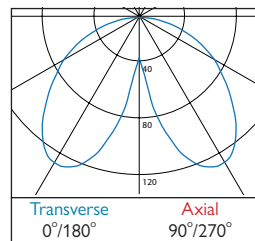

723 LOR: 0.40

Hacel[®]
 Fluent in Lighting