

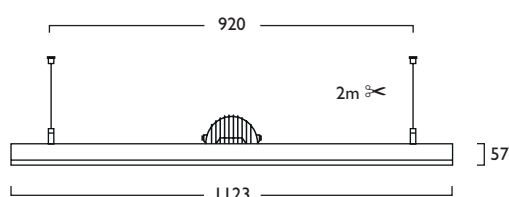
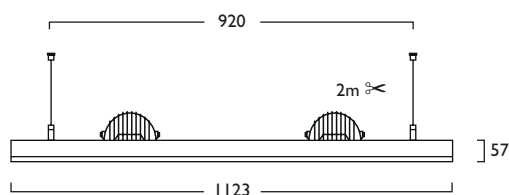


Link & Solo Suspended




- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview






Link Suspended Aleda Solo





Link Suspended Aleda Duet

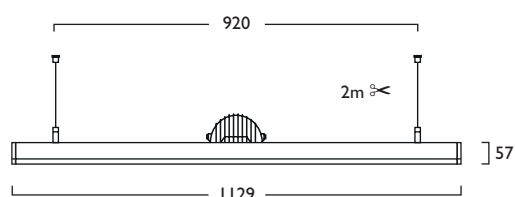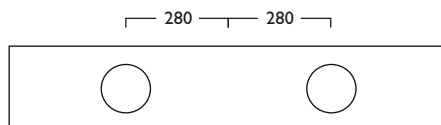


Solo Suspended Aleda Solo

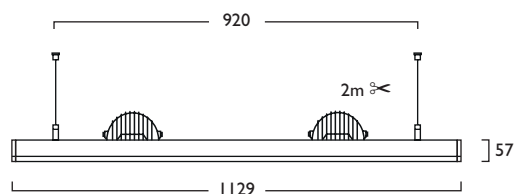

Solo Suspended Aleda Duet

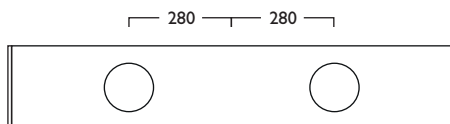

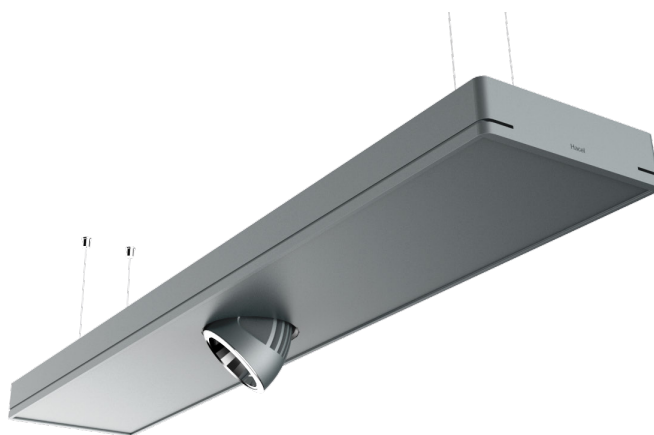

Linear Light5 Aleda®

Link & Solo Modules

LED CRI 80										
1x 12W	LED	1123mm	1072	LED	12	—	+	377		
1x 17W	LED	1123mm	1072	LED	17	—	+	377		
1x 22W	LED	1123mm	1072	LED	22	—	+	377		
1x 28W	LED	1123mm	1072	LED	28	—	+	377		
2x 12W	LED	1123mm	1074	LED	12	—	+	377		
2x 17W	LED	1123mm	1074	LED	17	—	+	377		
2x 22W	LED	1123mm	1074	LED	22	—	+	377		
2x 28W	LED	1123mm	1074	LED	28	—	+	377		

LED CRI 90										
1x 12W	LED	1123mm	1073	LED	12	—	+	378		
1x 17W	LED	1123mm	1073	LED	17	—	+	378		
1x 22W	LED	1123mm	1073	LED	22	—	+	378		
1x 28W	LED	1123mm	1073	LED	28	—	+	378		
2x 12W	LED	1123mm	1075	LED	12	—	+	378		
2x 17W	LED	1123mm	1075	LED	17	—	+	378		
2x 22W	LED	1123mm	1075	LED	22	—	+	378		
2x 28W	LED	1123mm	1075	LED	28	—	+	378		

230V
50Hz



920 X 80mm

8.5 kg

- Stylish Aleda® LED in Solo or Duet format neatly integrated into LL5 Module
- Available in a choice of lumen outputs, delivering up to 5445 lumens
- Efficacies up to 145 lm/W
- Single point Zhaga Book 3 LED
- Life expectancy in excess of 57,000 hours (L90 B10)
- Luminaires feature smooth and precise pan and tilt adjustment
- Link and Solo Modules available
- 4x 2m Suspension Wires and Chrome Clutches for ease of adjustment
- Wireless Lighting Control available, see Connected video for full overview
- Digital Dim and Digital Dim + Emergency options available on request

LA Link Suspended LD Solo Suspended

A Integral Driver/Remote
J Switch Dim
S DALI Dim
L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector	CRI 80	CRI 90
384 1x Narrow Beam	379	380
385 1x Wide Beam	381	382
480 2x Narrow Beam	379	380
481 2x Wide Beam	381	382


556 4x 5m Suspensions (wires only)
557 2x 2m Single point, twin suspensions (wires only)
144 2x 5m Single point, twin suspensions (wires only)

Luminescent Halo, Baffle Options Shown

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V3 - 07/2024

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

Hacer
Fluent Lighting

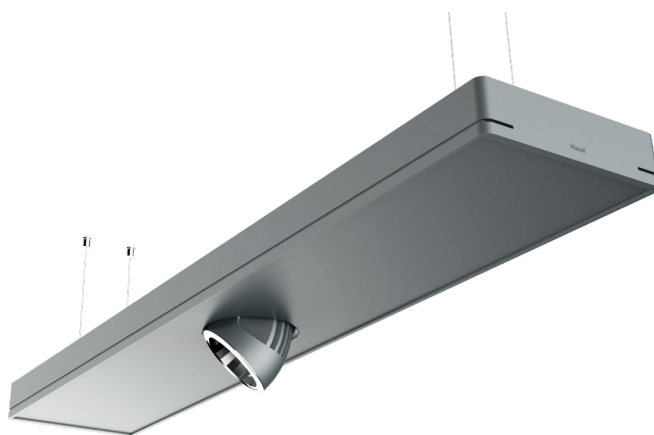

Linear Light5 Aleda®


3	Warm White LED (3000K)	CRI 80				CRI 90			
		12W	17W	22W	28W	12W	17W	22W	28W
	Lumen Output	2041 lm	2885 lm	4099 lm	5206 lm	1650 lm	2330 lm	3297 lm	4206 lm
	LOR	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
	CRI	80	80	80	80	90	90	90	90
	Total Power	11.9W	17.1W	24.4W	31.2W	11.9W	17.1W	24.4W	31.2W
	Power Factor	0.94	0.96	0.96	0.97	0.94	0.96	0.96	0.97
	Running Current	0.06A	0.08A	0.11A	0.14A	0.06A	0.08A	0.11A	0.14A
	Inrush Current (Std)	3.5A (35us)	18A (210us)	24A (200us)	30A (200us)	3.5A (35us)	18A (210us)	24A (200us)	30A (200us)
	Inrush Current (Dim)	10A (80us)	10A (50us)	3.31A (43us)	5.33A (42us)	10A (80us)	10A (50us)	3.31A (43us)	5.33A (42us)
	Efficacy	138 lm/W	136 lm/W	136 lm/W	135 lm/W	112 lm/W	110 lm/W	109 lm/W	109 lm/W
	Emergency Output (BLF)	361 (17%)	369 (12%)	359 (8%)	373 (7%)	306 (17%)	313 (12%)	304 (8%)	315 (7%)

4	Neutral White LED (4000K)	CRI 80				CRI 90			
		12W	17W	22W	28W	12W	17W	22W	28W
	Lumen Output	2143 lm	3023 lm	4294 lm	5445 lm	1796 lm	2533 lm	3620 lm	4592 lm
	LOR	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
	CRI	80	80	80	80	90	90	90	90
	Total Power	11.9W	17.1W	24.4W	31.2W	11.9W	17.1W	24.4W	31.2W
	Power Factor	0.94	0.96	0.96	0.97	0.94	0.96	0.96	0.97
	Running Current	0.06A	0.08A	0.11A	0.14A	0.06A	0.08A	0.11A	0.14A
	Inrush Current (Std)	3.5A (35us)	18A (210us)	24A (200us)	30A (200us)	3.5A (35us)	18A (210us)	24A (200us)	30A (200us)
	Inrush Current (Dim)	10A (80us)	10A (50us)	3.31A (43us)	5.33A (42us)	10A (80us)	10A (50us)	3.31A (43us)	5.33A (42us)
	Efficacy	145 lm/W	143 lm/W	142 lm/W	141 lm/W	122 lm/W	119 lm/W	120 lm/W	119 lm/W
	Emergency Output (BLF)	376 (17%)	385 (12%)	375 (8%)	388 (7%)	321 (17%)	328 (12%)	319 (9%)	332 (7%)


Table applies to one LED Light Engine

Options


■ Luminescent Halo, Baffle Options




473 1x / 486 2x
Etched Ice




474 1x / 487 2x
Neptune Blue




475 1x / 488 2x
Mars Red




477 1x / 489 2x
Acid Green




478 1x / 490 2x
Anti Glare Baffle



377-378 DLOR: 0.81



379-380 DLOR: 0.83



381-382 DLOR: 0.86

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V3 - 07/2024

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve its product and reserve the right to change specifications without prior notification.

Hacer
Fluent in Lighting