



Preparation

1

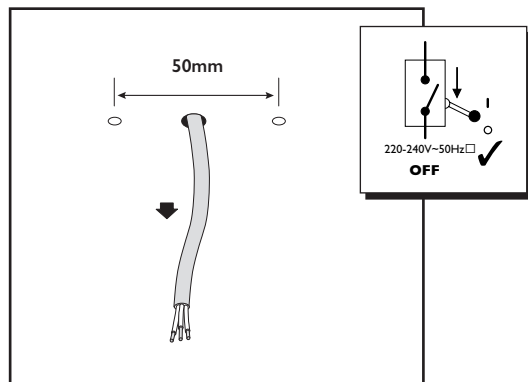


2

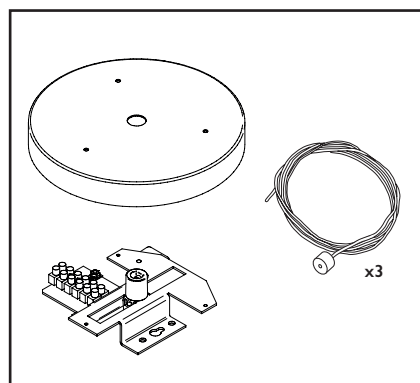


Installation

1

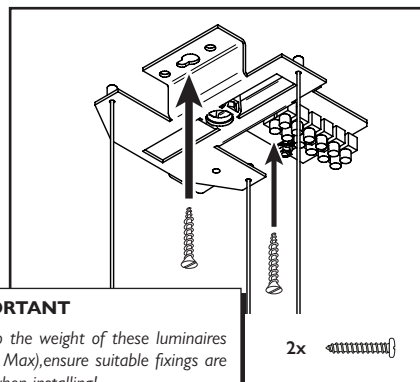


Installation Cont.


2

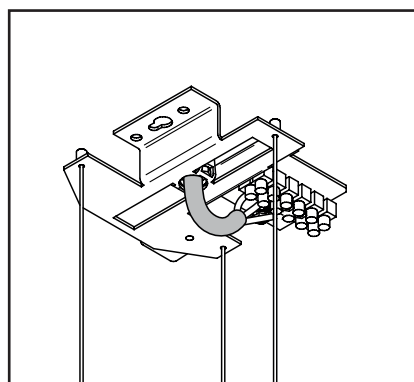

3

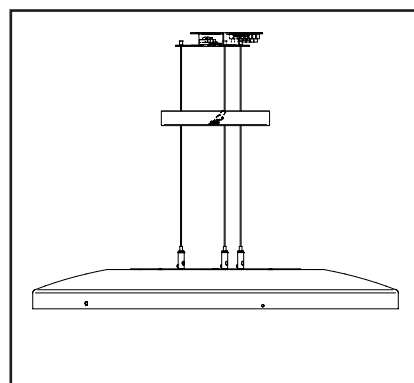


4

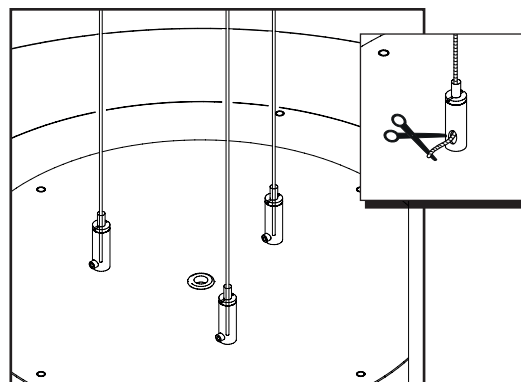


Installation Cont.


5

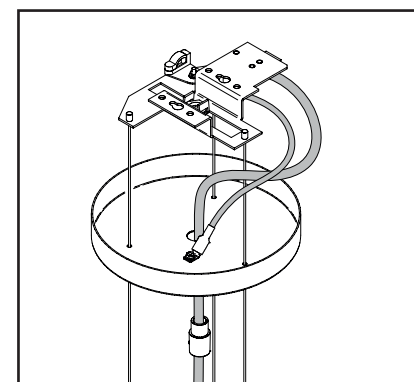

6

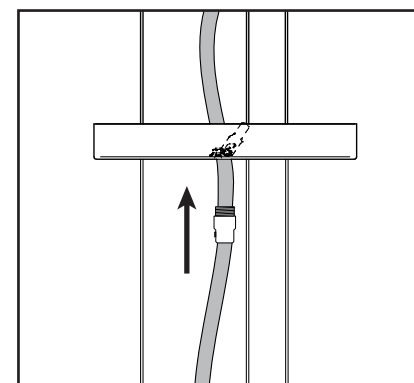


7

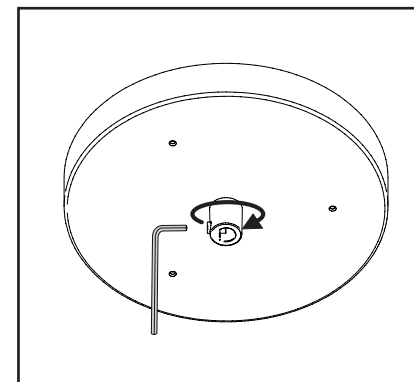


Installation Cont.

8

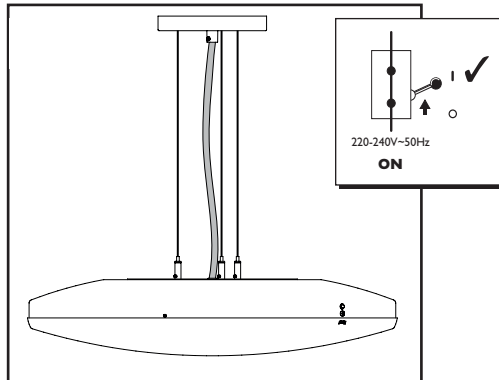


Emergency Battery Commissioning & Replacement


1

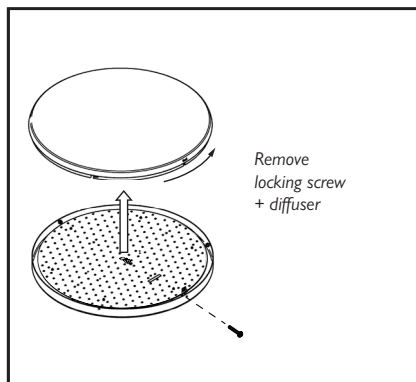

2

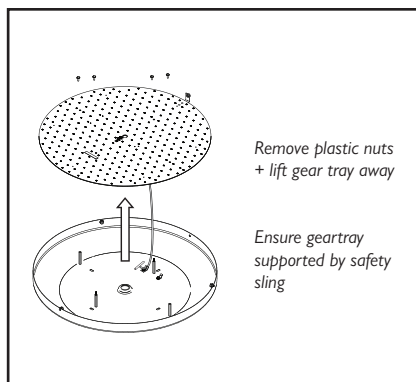


3

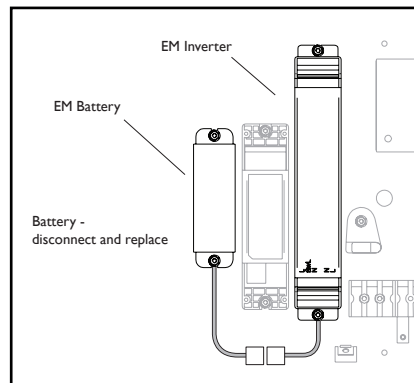

4

Reverse steps 1 & 2 to replace gear tray

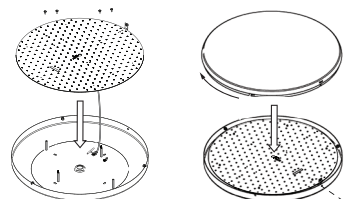

NOTE:

Hand-tighten nuts and refit diffuser and locking screw.

IMPORTANT INFORMATION

Lumera® Pendant

PN1340/PN1338/PN1336



Disconnect electricity supply before installation.

To be installed by qualified personnel only, in accordance with current building and wiring regulations

When installing, we recommend wearing disposable gloves to avoid fingerprinting to the paint work of the luminaire.

Read leaflet fully before installation.

Hacel®
Fluent in Lighting

THE SILVERLINK, WALLSEND, NEWCASTLE UPON TYNE,
TYNE & WEAR, NE28 9ND

Technical: (0191) 280 9914
Email: technical@hacel.co.uk
Web: www.hacel.co.uk