

Chrome Reflector  
(Standard)



IP65




Figures shown below are based on Gear Type - A Remote Driver

3	Warm White LED (3000K)	CRI 80	
		3W	6W
	Lumen Output	504 lm	979 lm
	LOR	0.79	0.79
	CRI	80	80
	Total Power	3.3W	6.8W
	Power Factor	0.65	0.9
	Running Current	0.01A	0.03A
	Inrush Current (Std)	16.0A	16.0A
	Inrush Current (Dim)	5.0A (100us)	5.0A (100us)
	Efficacy	120 lm/W	113 lm/W
	Emergency Output (BLF)	456 (90%)	446 (45%)

4	Neutral White LED (4000K)	CRI 80	
		3W	6W
	Lumen Output	533 lm	1035 lm
	LOR	0.79	0.79
	CRI	80	80
	Total Power	3.3W	6.8W
	Power Factor	0.65	0.9
	Running Current	0.01A	0.03A
	Inrush Current (Std)	16.0A	16.0A
	Inrush Current (Dim)	5.0A (100us)	5.0A (100us)
	Efficacy	127 lm/W	120 lm/W
	Emergency Output (BLF)	482 (90%)	472 (45%)

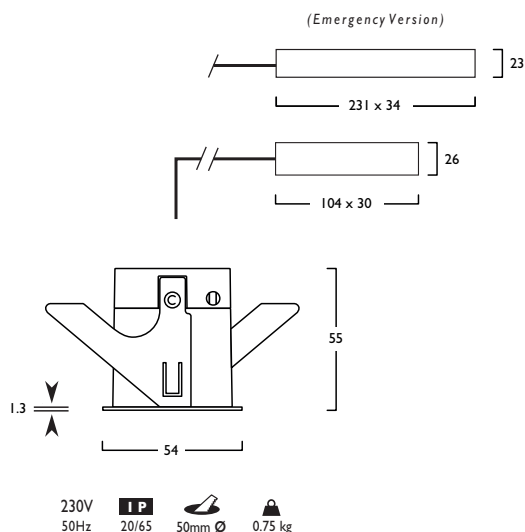

## Nano

**LED CRI 80**
  
 3W LED ID1550 LED 03 +
   
 6W LED ID1550 LED 06 +

Add the required Reflector to code from list shown on page 2 (Reflector - Options)  
All options are factory fitted.

- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction
- Range of Reflector options available, Chrome, Semi Matt, Dark Light & Gold
- Remote Emergency options available
- Outputs up to 1035 lumens
- Efficacies up to 120 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview
- CRI90 version available (ID1551)
- IP65 and Chrome versions available

- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth (6W Only)
- M** DALI Bluetooth + Emergency (6W Only)

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005) 4 Chrome

Reflector/ Polycarbonate Options - Examples Shown on page 2



# Nano

## Options


### Reflector / Polycarbonate Options




**630** Chrome 36° (Standard)  
**646** Clear Chrome 36° (IP65)



**631** Semi Matt 34°  
**647** Clear Semi Matt 34° (IP65)



**632** Dark Light 24°  
**648** Clear Dark Light 24° (IP65)



**633** Gold 30°  
**649** Clear Gold 30° (IP65)




**645** Opal Polycarbonate 36° (IP65)


All options are factory fitted.

Reflector				Polycarbonate			
	CRI 80				CRI 80		
<b>630</b> Chrome (Std) - 36°	724	<b>646</b> Clear Chrome - 36°	724	<b>645</b> Opal - 36°	733		
<b>631</b> Semi Matt - 34°	730	<b>647</b> Clear Semi Matt - 34°	730				
<b>632</b> Dark Light - 24°	731	<b>648</b> Clear Dark Light - 24°	731				
<b>633</b> Gold - 30°	732	<b>649</b> Clear Gold - 30°	732				


## Photometrics

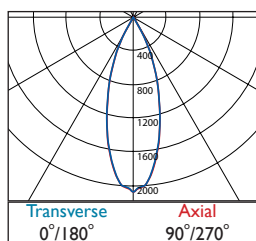


**724** DLOR: 0.79  
Chrome Reflector

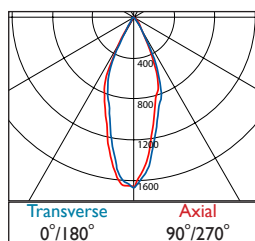


**730** DLOR: 0.79  
Matt Reflector

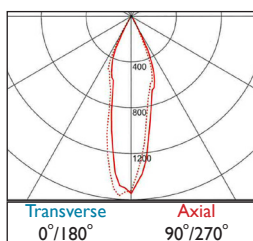

**731** DLOR: 0.53  
Dark Light Reflector

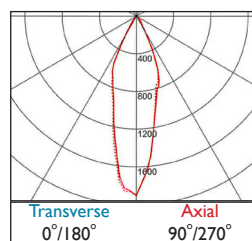

**732** DLOR: 0.75  
Gold Reflector

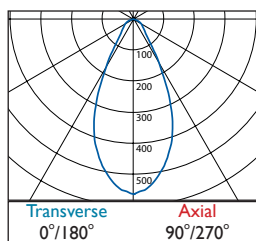

**733** DLOR: 0.47  
Flush Opal