


	CRI 80	Warm White LED (3000K)				CRI 90	Neutral White LED (4000K)			
		8W	15W	24W	30W		8W	15W	24W	30W
Lumen Output		1463 lm	2606 lm	3973 lm	5282 lm		1186 lm	2105 lm	3213 lm	4284 lm
LOR		0.93	0.93	0.93	0.93		0.93	0.93	0.93	0.93
CRI		80	80	80	80		90	90	90	90
Total Power		8.9W	16.4W	26.2W	33.7W		8.9W	16.4W	26.2W	33.7W
Power Factor		0.90	0.95	0.96	0.97		0.90	0.90	0.96	0.95
Running Current		0.04A	0.07A	0.12A	0.15		0.04A	0.09A	0.12A	0.17A
Inrush Current (Std)		3A (60us)	18A (210us)	24A (200us)	30A (200us)		3A (60us)	1.5A (60us)	24A (200us)	30A (200us)
Inrush Current (Dim)		15A (243us)	10A (80us)	3.31A (43us)	5.33A (42us)		10A (80us)	10A (80us)	3.31A (42us)	5.33A (42us)
Efficacy		152 lm/W	147 lm/W	141 lm/W	145 lm/W		122 lm/W	119 lm/W	114 lm/W	118 lm/W
Emergency Output (BLF)		373 (25%)	373 (14%)	373 (9%)	373 (7%)		313 (25%)	313 (14%)	313 (9%)	313 (7%)

Soledo® Square Maxi

LED CRI 80	8W	15W	24W	30W	Price
LED ID1101	08	15	24	30	479
LED ID1101	08	15	24	30	479
LED ID1101	08	15	24	30	479
LED ID1101	08	15	24	30	479

LED CRI 90	8W	15W	24W	30W	Price
LED ID1102	08	15	24	30	480
LED ID1102	08	15	24	30	480
LED ID1102	08	15	24	30	480
LED ID1102	08	15	24	30	480

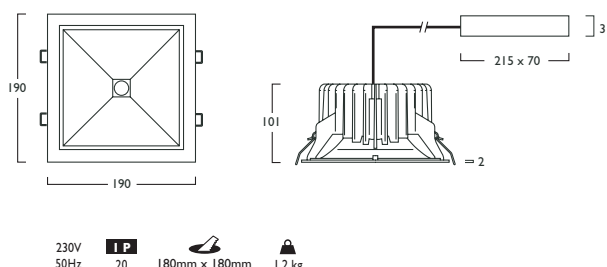


- Class leading LED Square Downlighter
- Exceptional engineering and thermal management
- Choice of lumen outputs, delivering lumens from 1463 to 5414 lumens
- Efficacies up to 160 lm/W
- Life expectancy in excess of 57,000 hours (L90 B10)
- CRI 80 and CRI 90 versions available, colour stability within 3 MacAdams
- Emergency versions available
- Wireless Lighting Control available, see Connected video for full overview

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency


- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

- Glass Options
- 550 Flush Clear
 - 559 Flush Etched

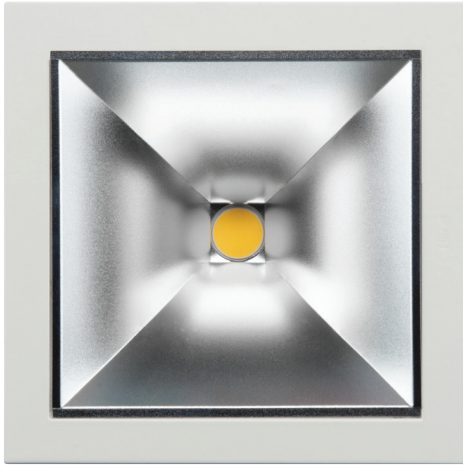

Soledo[®] Square Maxi

Photometrics

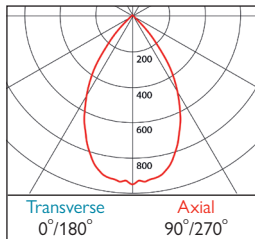

479-480 DLOR: 0.93