




| 3 Warm White LED (3000K) | CRI 80 | 15W           | 32W           | 50W           |
|--------------------------|--------|---------------|---------------|---------------|
| Lumen Output             |        | 2795 lm       | 5405 lm       | 8241 lm       |
| LOR                      |        | 0.70          | 0.70          | 0.70          |
| CRI                      |        | 80            | 80            | 80            |
| Total Power              |        | 17.2W         | 34.1W         | 54.3W         |
| Power Factor             |        | 0.87          | 0.96          | 0.95          |
| Running Current          |        | 0.7A          | 0.14A         | 0.22A         |
| Inrush Current (Std)     |        | 2.9A (61us)   | 25.0A (150us) | 25.9A (252us) |
| Inrush Current Dim       |        | 25.0A (140us) | 28.0A (165us) | 26.0A (264us) |
| Efficacy                 |        | 113 lm/W      | 110 lm/W      | 106 lm/W      |
| Emergency Output (BLF)   |        | 395 lm (14%)  | 387 lm (7%)   | 412 lm (5%)   |

| 4 Neutral White LED (4000K) | CRI 80 | 15W           | 32W           | 50W           |
|-----------------------------|--------|---------------|---------------|---------------|
| Lumen Output                |        | 2969 lm       | 5743 lm       | 8756 lm       |
| LOR                         |        | 0.70          | 0.70          | 0.70          |
| CRI                         |        | 80            | 80            | 80            |
| Total Power                 |        | 17.2W         | 34.1W         | 54.3W         |
| Power Factor                |        | 0.87          | 0.96          | 0.95          |
| Running Current             |        | 0.7A          | 0.14A         | 0.22A         |
| Inrush Current (Std)        |        | 2.9A (61us)   | 25.0A (150us) | 25.9A (252us) |
| Inrush Current Dim          |        | 25.0A (140us) | 28.0A (165us) | 26.0A (264us) |
| Efficacy                    |        | 120 lm/W      | 117 lm/W      | 112 lm/W      |
| Emergency Output (BLF)      |        | 417 lm (14%)  | 411 lm (7%)   | 438 lm (5%)   |

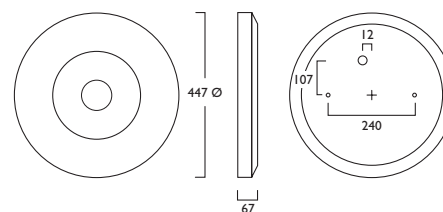

230V 50Hz IP 20 240mm 3.5 kg

Control Devices

PIR Handset



CD1603



X



PIR000

## Solos® Wall Light



LED

|     |     |       |     |    |   |     |
|-----|-----|-------|-----|----|---|-----|
| 15W | LED | WL286 | LED | 15 | + | 737 |
| 32W | LED | WL286 | LED | 32 | + | 737 |
| 50W | LED | WL286 | LED | 50 | + | 737 |

LED & MW

|     |     |       |     |    |   |     |
|-----|-----|-------|-----|----|---|-----|
| 15W | LED | WL329 | LED | 15 | + | 737 |
| 32W | LED | WL329 | LED | 32 | + | 737 |
| 50W | LED | WL329 | LED | 50 | + | 737 |

MW versions not suitable for use with Gear Types J and K

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim (WL286 only)
- K Switch Dim + Emergency (WL286 only)
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Luminescent Halo Options - Examples Shown on page 2

- High performance LED Circular light offering 65,000 hour life expectancy (L80 B10)
- Lumen outputs from 2795 to 8756 lumens
- Efficacies up to 120 lm/W
- Colour stability within 3 MacAdams
- Microwave Control is discreetly concealed behind diffuser
- Slim luminaire projection of only 67mm
- Centre feature and housing available in White, Black or Urban Graphite
- The sensor defaults can be modified via dip switches for non-dimmable versions and with the use of the PIR Handset for dimmable versions (contact Technical for advice if required)
- TP(b) rated as standard
- Complementary Pendant, Recessed and Surface versions available.
- Wireless Lighting Control available, see Connected video for full overview
- Dip switch settings can be found on Installation document - default setting is 5 Seconds



## Solos<sup>®</sup> Wall Light

### Options

#### ■ Luminescent Edge Options



469 Neptune Blue




470 Mars Red



472 Acid Green

### Photometrics

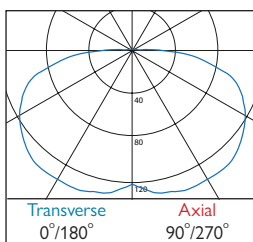

**737** DLOR: 0.70