



3 Warm White LED (3000K)	CRI 80			CRI 90		
	17W	24W	29W	22W	30W	36W
Lumen Output	3264 lm	4338 lm	5063 lm	4080 lm	5422 lm	6329 lm
LOR	0.82	0.82	0.82	0.82	0.82	0.82
CRI	80	80	80	80	80	80
Total Power	19.2W	26.7W	31.9W	23.7W	33.3W	39.8W
Power Factor	0.81	0.96	0.97	0.89	0.95	0.95
Running Current	0.07A	0.11A	0.14A	0.09A	0.14A	0.17A
Inrush Current (Std)	5.33A (38us)	15A (250us)	15.0A (250us)	28A (150us)	25.0A (280us)	25.0A (280us)
Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)
Efficacy	139 lm/W	133 lm/W	130 lm/W	141 lm/W	133 lm/W	130 lm/W
Emergency Output (BLF)	455 lm (14%)	455 lm (10%)	455 lm (9%)	327 lm (8%)	327 lm (6%)	327 lm (5%)

4 Neutral White LED (4000K)	CRI 80			CRI 90		
	17W	24W	29W	22W	30W	36W
Lumen Output	3494 lm	4643 lm	5420 lm	4352 lm	5783 lm	6751 lm
LOR	0.82	0.82	0.82	0.82	0.82	0.82
CRI	80	80	80	80	80	80
Total Power	19.2W	26.7W	31.9W	23.7W	33.3W	39.8W
Power Factor	0.81	0.96	0.97	0.89	0.95	0.95
Running Current	0.07A	0.11A	0.14A	0.09A	0.14A	0.17A
Inrush Current (Std)	5.33A (38us)	15A (250us)	15.0A (250us)	28A (150us)	25.0A (280us)	25.0A (280us)
Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)
Efficacy	149 lm/W	142 lm/W	139 lm/W	150 lm/W	142 lm/W	139 lm/W
Emergency Output (BLF)	478 lm (14%)	478 lm (10%)	478 lm (9%)	344 lm (8%)	344 lm (6%)	344 lm (5%)

Tutor[®] Surface

LED	Wattage	Length	Model	Color	Beam	Height
17W LED	1203mm	SM1666	LED	17	760	
24W LED	1203mm	SM1666	LED	24	760	
29W LED	1203mm	SM1666	LED	29	760	
22W LED	1483mm	SM1668	LED	22	761	
30W LED	1483mm	SM1668	LED	30	761	
36W LED	1483mm	SM1668	LED	36	761	

LED & MW

LED & MW	Wattage	Length	Model	Color	Beam	Height
17W LED	1203mm	SM1670	LED	17	760	
24W LED	1203mm	SM1670	LED	24	760	
29W LED	1203mm	SM1670	LED	29	760	
22W LED	1483mm	SM1672	LED	22	761	
30W LED	1483mm	SM1672	LED	30	761	
36W LED	1483mm	SM1672	LED	36	761	

MW versions not suitable for use with Gear Types J, K, L and M


Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010)

640 Tamper Proof End Caps

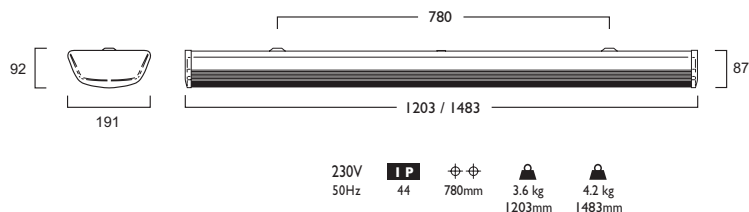

Control Devices

PIR Handset

- CD1603 PIR000


- Available in a choice of lumen output up to 6751 lumens
- Efficacies up to 150 lm/W
- Life expectancy 72,000 hours (L80 B10)
- UGR compliant across all wattages, rated at UGR 19 or less
- IP44 and IK08 rated with colour stability within 3 MacAdams
- Complementary Pendant version available
- Tool Free extruded Polycarbonate Diffuser and Gear Tray for quick and easy installation
- Wireless Lighting Control available, see Connected video for full overview
- Available with integral Bluetooth or Microwave sensors
- The Microwave sensors defaults can be modified via dip switches for non-dimmable versions and the use of the PIR Handset for dimmable versions. (Contact Technical for advice if required)
- Dip switch settings can be found on installation document - default setting is 5 Seconds
- Suitable for mounting with 20mm and 25mm conduit / besa boxes on 600mm centres or direct feed via knock outs
- Tamper proof end caps option available
- CRI90 options available SM1667 & SM1669





Tutor[®] Surface

Photometrics



760-761 DLOR: 0.82