




Allure Pendant Closed Diffuser

- Lumen outputs up to 2550 lumens
- Efficacies of up to 136 lm/W
- Life expectancy in excess of 64,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Available in a range of specialist colours, including: Metallic Anthracite, Metallic Blue, Metallic Copper, Anodic Gold and Anodic Malachite
- CRI 90 options available on request, PN1649 Closed Diffuser

3	Warm White LED (3000K)	CRI 80		
		6W	12W	19W
	Delivered Lumens	938 lm	1607 lm	2430 lm
	LOR	1.0	1.0	1.0
	CRI	80	80	80
	Total Power	7.2W	12.8W	20.7W
	Power Factor	0.9	0.96	0.97
	Running Current	0.04A	0.06A	0.09A
	Inrush Current (Std)	3A (60us)	3.5A (35us)	18A (210us)
	Inrush Current (Dim)	10A (80us)	10A (80us)	10A (80us)
	Efficacy	130 lm/W	125 lm/W	117 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80		
		6W	12W	19W
	Delivered Lumens	984 lm	1686 lm	2550 lm
	LOR	1.0	1.0	1.0
	CRI	80	80	80
	Total Power	7.2W	12.8W	20.7W
	Power Factor	0.9	0.96	0.97
	Running Current	0.04A	0.06A	0.09A
	Inrush Current (Std)	3A (60us)	3.5A (35us)	18A (210us)
	Inrush Current (Dim)	10A (80us)	10A (80us)	10A (80us)
	Efficacy	136 lm/W	131 lm/W	123 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A

Note: Figures above refer to standard A gear unless stated

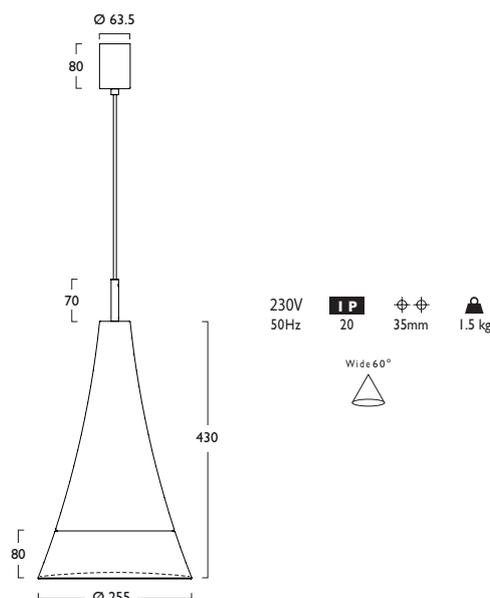

Allure Closed Diffuser

LED	6W	12W	19W
LED	430	430	430
PN	1648	1648	1648
LED	06	12	19
+	+	+	+
789	789	789	789

- A Integral Driver/Remote
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

MA Metallic Anthracite MB Metallic Blue MC Metallic Copper AG Anodic Gold AM Anodic Malachite

799 5m Power Cord

Photometrics



789 DLOR: 1.0

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V2 - 03/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

Hacel[®]
Fluent in Lighting




Allure Pendant Open Diffuser

- Lumen outputs up to 2808 lumens
- Efficacies of up to 154 lm/W
- Life expectancy in excess of 60,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Available in a range of specialist colours, including: Metallic Anthracite, Metallic Blue, Metallic Copper, Anodic Gold and Anodic Malachite
- CRI 90 options available on request, PN1651 Open Diffuser
- Lens options available for Spot, Medium and Wide beams

3	Warm White LED (3000K)	CRI 80		
		6W	11W	17W
	Delivered Lumens	1013 lm	1761 lm	2718 lm
	LOR	1.0	1.0	1.0
	CRI	80	80	80
	Total Power	6.8W	12W	19.3W
	Power Factor	0.9	0.95	0.96
	Running Current	0.03A	0.05A	0.09A
	Inrush Current (Std)	3A (60us)	3.5A (35us)	18A (210us)
	Inrush Current (Dim)	10A (80us)	10A (80us)	10A (80us)
	Efficacy	148 lm/W	146 lm/W	140 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80		
		6W	11W	17W
	Delivered Lumens	1051 lm	1823 lm	2808 lm
	LOR	1.0	1.0	1.0
	CRI	80	80	80
	Total Power	6.8W	12W	19.3W
	Power Factor	0.9	0.95	0.96
	Running Current	0.03A	0.05A	0.09A
	Inrush Current (Std)	3A (60us)	3.5A (35us)	18A (210us)
	Inrush Current (Dim)	10A (80us)	10A (80us)	10A (80us)
	Efficacy	154 lm/W	151 lm/W	145 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A

Note: Figures above refer to standard A gear unless stated

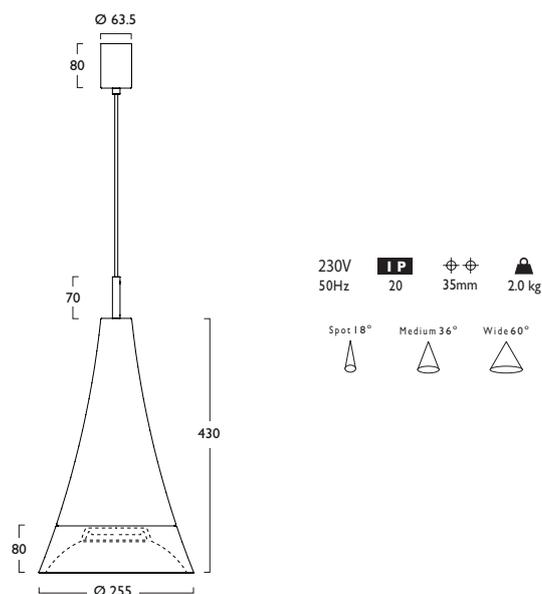

Allure Open Diffuser

LED	6W	11W	17W
LED	430	430	430
PN	1650	1650	1650
LED	06	11	17
LED	06	11	17
LED	06	11	17

- A** Integral Driver/Remote
J Switch Dim
S DALI Dim
L DALI Bluetooth
- Lens Options**
800 Medium Beam Lens 36° (791)
801 Spot Beam Lens 18° (790)
802 Wide Beam Lens 60° (792)


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

MA Metallic Anthracite MB Metallic Blue MC Metallic Copper AG Anodic Gold AM Anodic Malachite

799 5m Power Cord

Photometrics

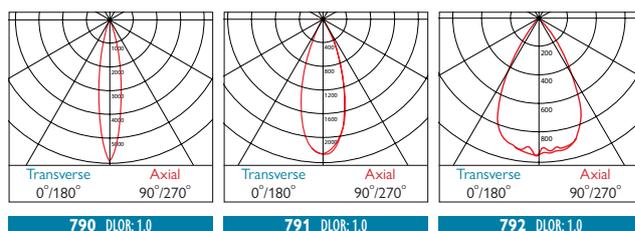

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V2 - 03/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.