





	CRI 80	
	15W	24W
3 Warm White LED (3000K)		
Lumen Output	2706 lm	4022 lm
LOR	0.62	0.62
CRI	80	80
Total Power	17.3W	27.4W
Power Factor	0.95	0.96
Running Current	0.08A	0.12A
Inrush Current (Std)	15.0A (204us)	16.0A (229us)
Inrush Current (Dim)	18.0A (140us)	25.0A (141us)
Efficacy	96 lm/W	91 lm/W
Emergency Output (BLF)	460 lm (17%)	442 lm (11%)
4 Neutral White LED (4000K)		
Lumen Output	2832 lm	4209 lm
LOR	0.62	0.62
CRI	80	80
Total Power	17.3W	27.4W
Power Factor	0.95	0.96
Running Current	0.08A	0.12A
Inrush Current (Std)	15.0A (204us)	16.0A (229us)
Inrush Current (Dim)	18.0A (140us)	25.0A (141us)
Efficacy	101 lm/W	95 lm/W
Emergency Output (BLF)	481 lm (17%)	462 lm (11%)

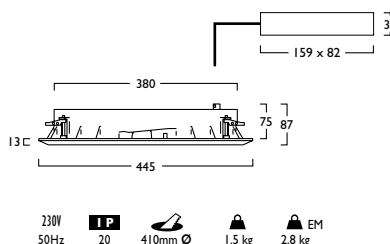

Ambiere



LED

Power	LED	ID	LED	15	1	+	372
15W	LED	ID396	LED	15	1	+	372
24W	LED	ID396	LED	24	1	+	372

LED & MW

Power	LED	ID	LED	15	1	+	372
15W	LED	ID397	LED	15	1	+	372
24W	LED	ID397	LED	24	1	+	372

MW versions not suitable for use with Gear Types J, K, L and M

Control Devices

Control Device	CD	X	PIR
Microware/PIR Controller	CD295	X	PIR000
Microware/PIR Programmer	CD296	X	PIR000

- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim (ID396 only)
- K** Switch Dim + Emergency (ID396 only)
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth (ID396 only)
- M** DALI Bluetooth + Emergency (ID396 only)

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010)

250 Gasket (IP44)

Glass, Luminescent Halo Options - Examples Shown on page 2

- High performance, contemporary luminaire with understated presence
- Available in a choice of lumen outputs, delivering up to 4209 lumens
- Efficacies up to 101 lm/W
- Precision injection moulded low profile construction
- High quality Opal polycarbonate diffuser
- Exceptional life expectancy in excess of 72,000 hours (L80 B10)
- Coloured and etched customisation Options
- TP(b) Rated as standard
- The Microwave Sensor defaults can be modified with the use of the Hand Held Controller or Programmer (contact Technical for advice)
- IP44 Rated when used with Gasket Option 250
- Wireless Lighting Control available

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V3 - 05/2026

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.




Ambiere

Options

■ **Glass, Luminescent Halo** Options



501 Clear Glass



502 Neptune Blue




503 Mars Red



504 Acid Green

Photometrics



372 DLOR: 0.62

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.