


Chyme® Cylo

Chyme® Accent

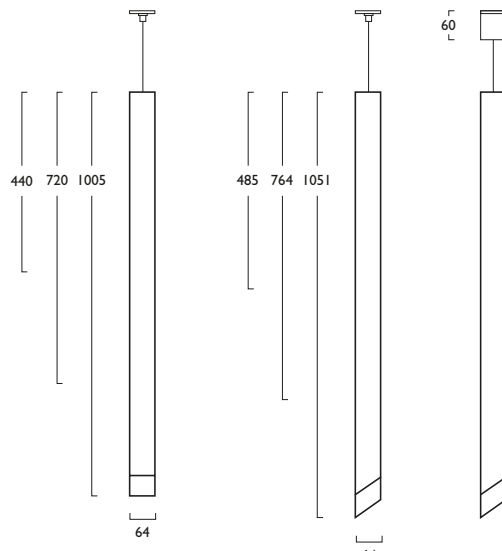

230V 50Hz IP20 50mm 1.9 kg

Chyme® Cylo

|     |     |      |         |     |    |   |     |   |
|-----|-----|------|---------|-----|----|---|-----|---|
| LED | ☀   | 📏    | 🏠       | 📱   | Ⓚ  | 🔌 | +   | ⚠ |
| 7W  | LED | 440  | PN 1166 | LED | 07 | + | 504 |   |
| 7W  | LED | 720  | PN 1168 | LED | 07 | + | 506 |   |
| 7W  | LED | 1005 | PN 1170 | LED | 07 | + | 508 |   |

Chyme® Accent

|     |     |      |         |     |    |   |     |   |
|-----|-----|------|---------|-----|----|---|-----|---|
| LED | ☀   | 📏    | 🏠       | 📱   | Ⓚ  | 🔌 | +   | ⚠ |
| 7W  | LED | 485  | PN 1172 | LED | 07 | + | 504 |   |
| 7W  | LED | 764  | PN 1174 | LED | 07 | + | 506 |   |
| 7W  | LED | 1051 | PN 1176 | LED | 07 | + | 508 |   |

- Slim, contemporary LED Pendant available in a choice of 3 lengths and 2 design options
- Lumen outputs from 1164 to 1212 lumens
- Efficacies of up to 110 lm/W
- Single point Zhaga Book 3 LED
- Life expectancy in excess of 60,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- A range of specialist finishes available on request, including: Copper Metallic, Anthracite Metallic, Anodic Malachite, Anodic Gold and Pearl Gentian Blue Metallic
- Wireless Lighting Control available
- Digital Dim and Digital Dim + Emergency options available

- A Integral Driver/Remote
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

- 561 5m Suspension (wire only)
- 562 Connector Housing

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V5 - 05/2026

\* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

3 Warm White LED (3000K)

|                        |               |
|------------------------|---------------|
| Lumen Output           | 1164 lm       |
| LOR                    | 0.63          |
| CRI                    | 80            |
| Total Power            | 6.9W          |
| Power Factor           | 0.75          |
| Running Current        | 0.04A         |
| Inrush Current (Std)   | 3.0A (45us)   |
| Inrush Current (Dim)   | 13.8A (282us) |
| Efficacy               | 106 lm/W      |
| Emergency Output (BLF) | N/A           |

CRI 80 7W

4 Neutral White LED (4000K)


|                        |               |
|------------------------|---------------|
| Lumen Output           | 1212 lm       |
| LOR                    | 0.63          |
| CRI                    | 80            |
| Total Power            | 6.9W          |
| Power Factor           | 0.75          |
| Running Current        | 0.04A         |
| Inrush Current (Std)   | 3.0A (45us)   |
| Inrush Current (Dim)   | 13.8A (282us) |
| Efficacy               | 110 lm/W      |
| Emergency Output (BLF) | N/A           |

CRI 80 7W

Photometrics



562 Connector Housing

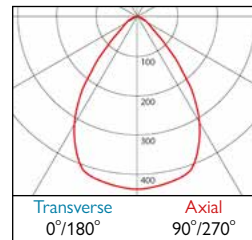

504, 506, 508 DLOR: 0.63