



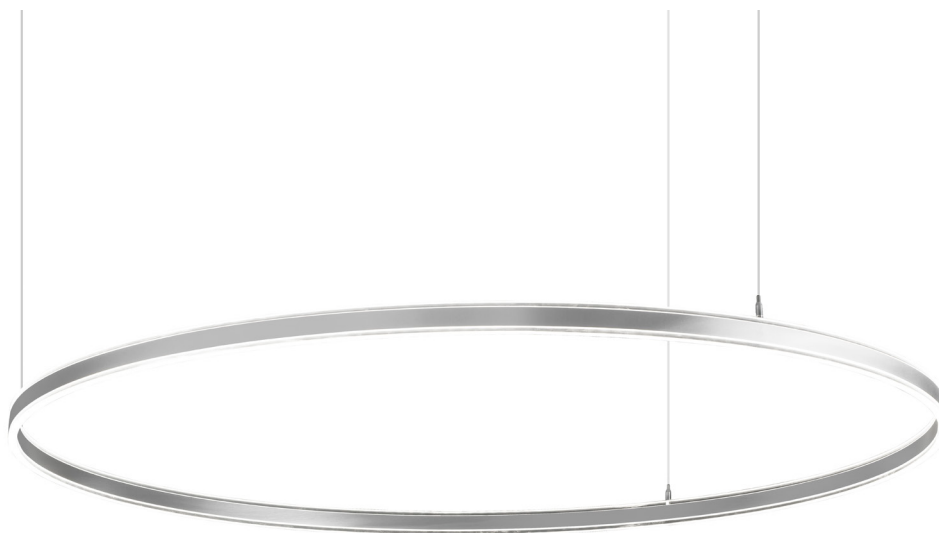

3	Warm White LED (3000K)	CRI 80	23W	31W	39W	47W	54W	62W	70W
	Delivered Lumens		2212 lm	2949 lm	3686 lm	4423 lm	5160 lm	5898 lm	6635 lm
	LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
	CRI		80	80	80	80	80	80	80
	Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
	Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
	Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
	Inrush Current (Std)		25.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)
	Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
	Efficacy		83 lm/W	88 lm/W	88 lm/W	87 lm/W	89 lm/W	88 lm/W	88 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A	N/A	N/A	N/A	N/A
4	Neutral White LED (4000K)	CRI 80	23W	31W	39W	47W	54W	62W	70W
	Delivered Lumens		2223 lm	2964 lm	3705 lm	4446 lm	5187 lm	5928 lm	6669 lm
	LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
	CRI		80	80	80	80	80	80	80
	Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
	Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
	Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
	Inrush Current (Std)		25.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)
	Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
	Efficacy		83 lm/W	88 lm/W	88 lm/W	88 lm/W	89 lm/W	88 lm/W	88 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A	N/A	N/A	N/A	N/A

Explora® Halo Direct Indirect

LED CRI 80



23W	LED	Ø520mm	PN1705	—	LED	—	23	—	+	805
31W	LED	Ø680mm	PN1706	—	LED	—	31	—	+	806
39W	LED	Ø840mm	PN1707	—	LED	—	39	—	+	807
47W	LED	Ø1000mm	PN1708	—	LED	—	47	—	+	808
54W	LED	Ø1160mm	PN1709	—	LED	—	54	—	+	809
62W	LED	Ø1315mm	PN1710	—	LED	—	62	—	+	810
70W	LED	Ø1475mm	PN1711	—	LED	—	70	—	+	811

A Integral Driver/Remote
J Switch Dim
S DALI Dim
L DALI Bluetooth

3 Warm (3000K) **4** Neutral (4000K)

SI Silver **BL** Black **BR** Brass **CO** Copper

264 3x 5m Suspensions (wires only)


693 Halo Ceiling Plate White
694 Halo Ceiling Plate Black
695 Halo Ceiling Plate Urban Graphite
696 Halo Surface Mounted Gear Housing White
697 Halo Surface Mounted Gear Housing Black
698 Halo Surface Mounted Gear Housing Urban Graphite

- Elegant LED circular pendant with 4 colour options for trim
- Available in seven sizes
- Lumen outputs from 2223 to 6669 lumens
- Life expectancy of 50,000hrs (L80 B10)
- Colour stability within 3 MacAdams
- Supplied with remote driver and a white ceiling plate, options available for Black and Urban Graphite plate and surface mounted driver housing
- Wireless Lighting Control available


Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V8 - 05/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

Hacel
 Fluent in Lighting

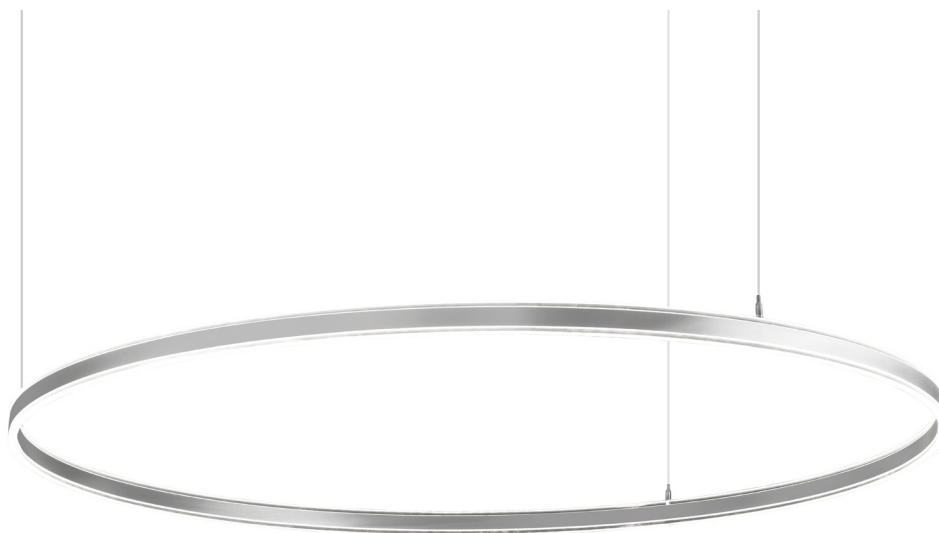

Explora® Halo Direct Indirect

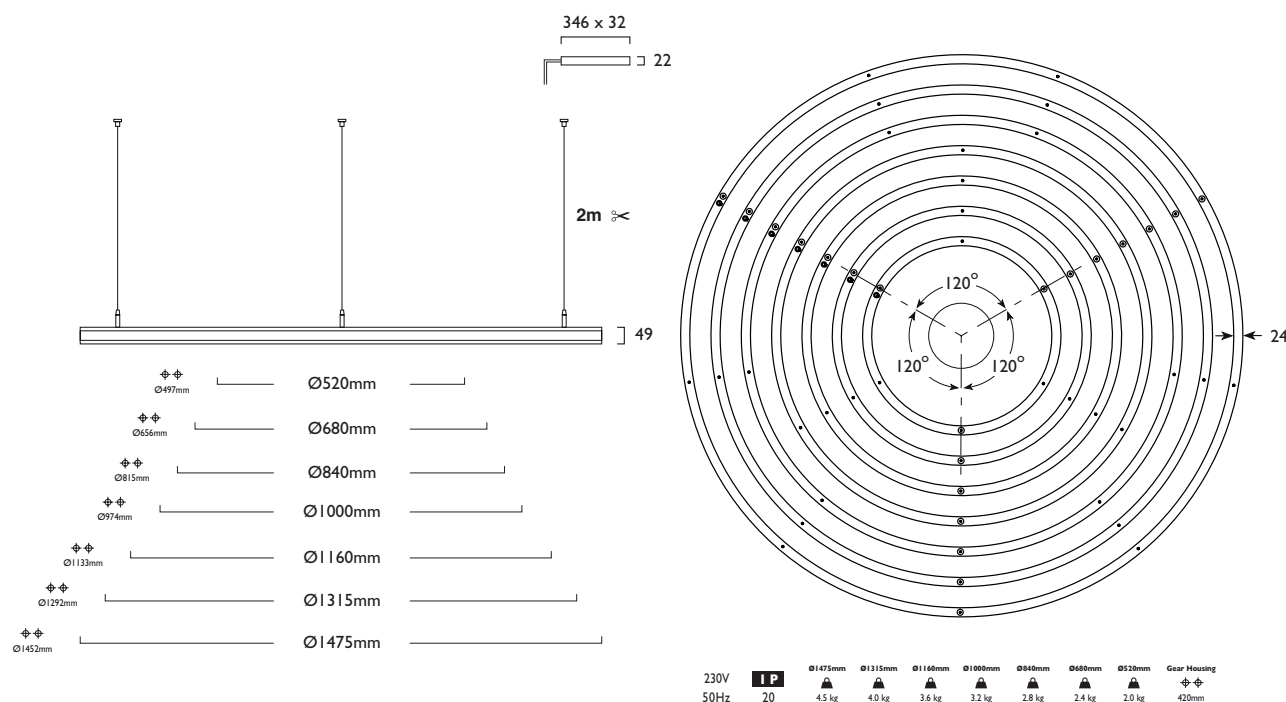

Photometrics

