

3 Warm White LED (3000K)	CRI 80	23W	31W	39W	47W	54W	62W	70W
Delivered Lumens		1222 lm	1630 lm	2037 lm	2444 lm	2852 lm	3259 lm	3667 lm
LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
CRI		80	80	80	80	80	80	80
Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
Inrush Current (Std)		25.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)
Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
Emergency Output (BLF)		N/A	N/A	N/A	N/A	N/A	N/A	N/A

4 Neutral White LED (4000K)	CRI 80	23W	31W	39W	47W	54W	62W	70W
Delivered Lumens		1229 lm	1638 lm	2048 lm	2457 lm	2867 lm	3276 lm	3686 lm
LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
CRI		80	80	80	80	80	80	80
Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
Inrush Current (Std)		25.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)	50.0A (250us)
Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
Emergency Output (BLF)		N/A	N/A	N/A	N/A	N/A	N/A	N/A

Explora® Halo Direct

LED CRI 80										
23W	LED	Ø520mm	PN1715	_	LED	_	23	_	+	812
31W	LED	Ø680mm	PN1716	_	LED	_	31	_	+	813
39W	LED	Ø840mm	PN1717	_	LED	_	39	_	+	814
47W	LED	Ø1000mm	PN1718	_	LED	_	47	_	+	815
54W	LED	Ø1160mm	PN1719	_	LED	_	54	_	+	816
62W	LED	Ø1315mm	PN1720	_	LED	_	62	_	+	817
70W	LED	Ø1475mm	PN1721	_	LED	_	70	_	+	818

- Elegant LED circular pendant with colour options for mirrored trim
- Available in seven sizes
- Lumen outputs from 1222 to 3686 lumens
- Life expectancy of 50,000hrs (L80 B10)
- Colour stability within 3 MacAdams
- Supplied with remote driver and a white ceiling plate, options available for Black and Urban Graphite plate and surface mounted driver housing
- Wireless Lighting Control available

A Integral Driver/Remote
J Switch Dim
S DALI Dim
L DALI Bluetooth

3 Warm (3000K) **4** Neutral (4000K)

SI Silver (Chrome) **BL** Black **BR** Brass **CO** Copper **WH** White

693 Halo Ceiling Plate White
694 Halo Ceiling Plate Black
695 Halo Ceiling Plate Urban Graphite
696 Halo Surface Mounted Gear Housing White
697 Halo Surface Mounted Gear Housing Black
698 Halo Surface Mounted Gear Housing Urban Graphite

Tel: **(0191) 280 9911** Email: **technical@hacel.co.uk** Web: **www.hacel.co.uk**

V13 - 11/2026


** All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.*


Hacel® Fluent in Lighting

PRODUCT INFORMATION




Explora® **Halo** Direct

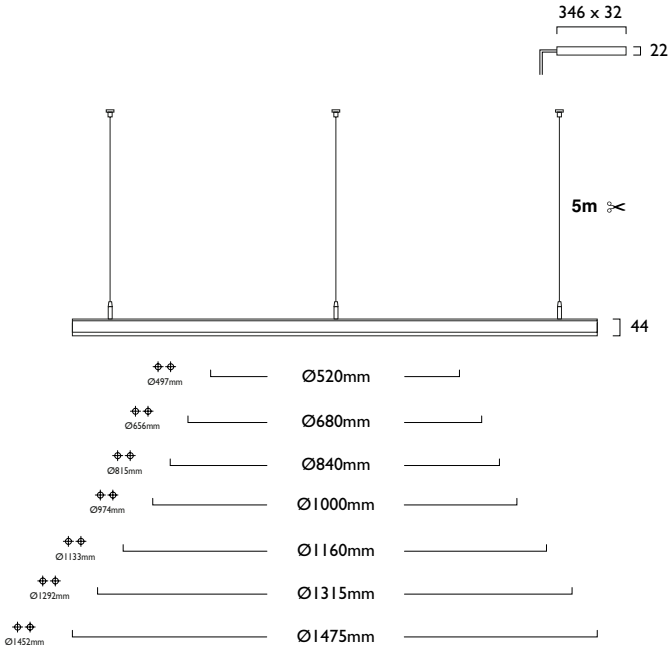

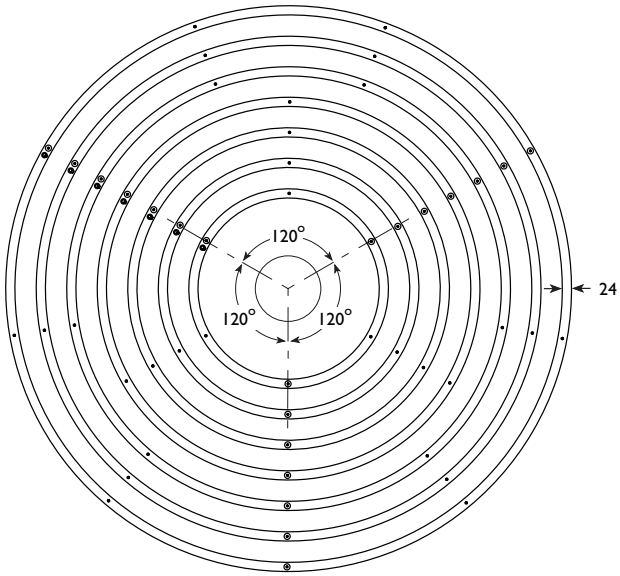


		Ø1475mm	Ø1315mm	Ø1160mm	Ø1000mm	Ø840mm	Ø680mm	Ø520mm	Gear Housing
230V 50Hz	IP 20	3.8 kg	3.3 kg	3.0 kg	2.7 kg	2.4 kg	2.0 kg	1.7 kg	420mm


Photometrics



812-818 DLOR: 1.0

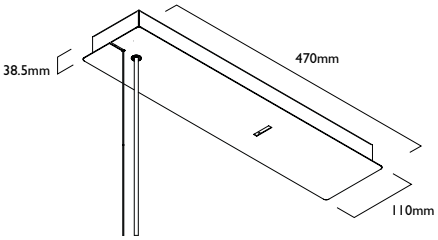

Surface Mounted Gear Housing



Ceiling Plate

Tel: **(0191) 280 9911** Email: **technical@hacel.co.uk** Web: **www.hacel.co.uk**

** All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.*

Hacel® Fluent in Lighting