




3	Warm White LED (3000K)	CRI 80	22W	29W
	Lumen Output		3705 lm	4829 lm
	LOR		0.89	0.89
	CRI		80	80
	Total Power		24.7W	32.9W
	Power Factor		0.95	0.95
	Running Current		0.11A	0.15A
	Inrush Current (Std)		8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)		9.6A (34us)	9.6A (34us)
	Efficacy		133 lm/W	130 lm/W
	Emergency Output (BLF)		N/A	N/A

4	Neutral White LED (4000K)	CRI 80	22W	29W
	Lumen Output		3877 lm	5053 lm
	LOR		0.89	0.89
	CRI		80	80
	Total Power		24.7W	32.9W
	Power Factor		0.95	0.95
	Running Current		0.11A	0.15A
	Inrush Current (Std)		8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)		9.6A (34us)	9.6A (34us)
	Efficacy		139 lm/W	136 lm/W
	Emergency Output (BLF)		N/A	N/A

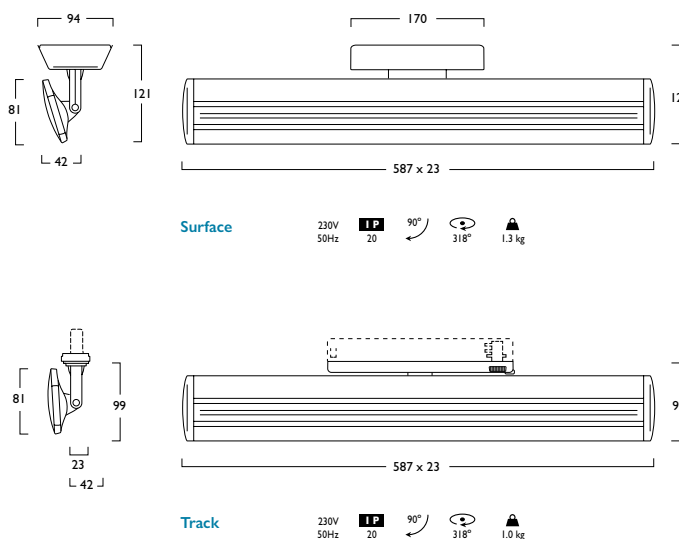

Flite® Wallwasher

Surface	22W	29W	LED	SM1208	LED	22	29	566
	22W	29W	LED	SM1208	LED	22	29	566
	29W		LED	SM1208	LED	29		566

Three Circuit Track	22W	29W	LED	TT1208	LED	22	29	566
	22W	29W	LED	TT1208	LED	22	29	566
	29W		LED	TT1208	LED	29		566

DALI Track	22W	29W	LED	TD1208	LED	22	29	566
	22W	29W	LED	TD1208	LED	22	29	566
	29W		LED	TD1208	LED	29		566


TT versions use Gear Type A & L
 TD versions not suitable for use with Gear Types A & L

- A** Integral Driver/Remote
 - J** Switch Dim
 - S** DALI Dim
 - L** DALI Bluetooth
- 3** Warm (3000K) **4** Neutral (4000K)
- I** White (RAL 9010)

Interconnection options available contact Sales

- Ultra slim luminaire with superior wallwashing illumination
- Available in a choice of lumen outputs, delivering up to 5053 lumens
- Efficacies up to 139 lm/W
- Colour stability within 3 MacAdams
- Outstanding performance with an LOR of 0.89
- Life expectancy in excess of 72,000 hours (L80 B10)
- DALI Track versions are eminently suited to diverse, adaptable lighting scenarios.
 The Track requires the relevant dimming wiring
- Wireless Lighting Control available, see Connected video for full overview

Photometrics

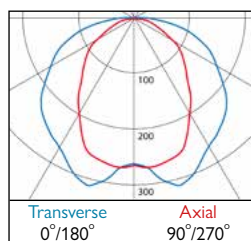

566 DLOR: 0.89

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.