



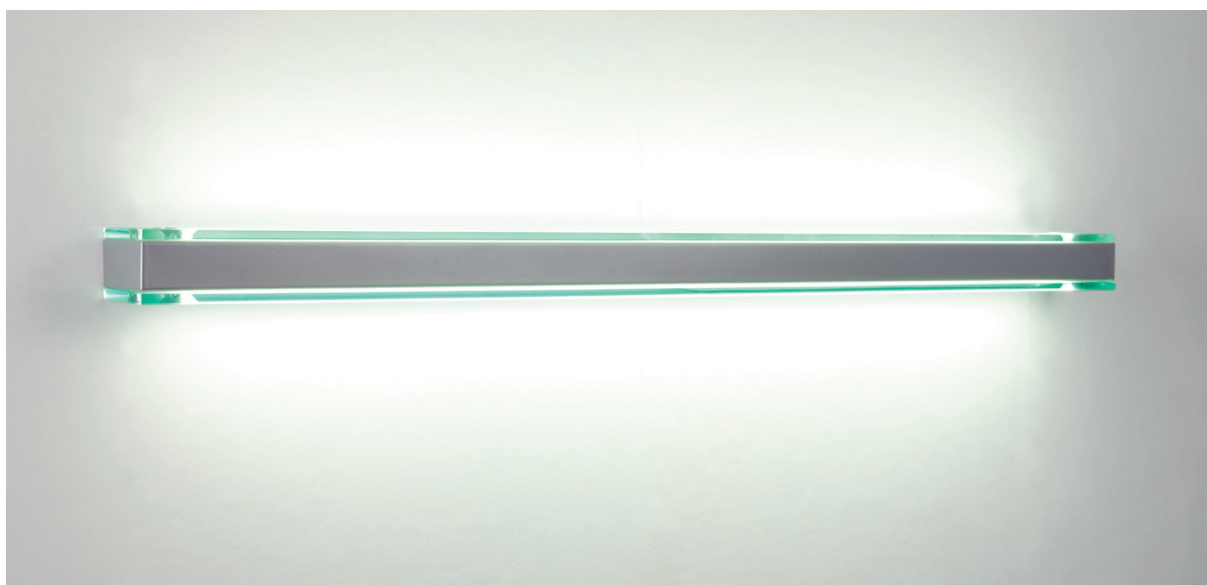

3	Warm White LED (3000K)	CRI 80	15W	31W
	Lumen Output		2840 lm	5526 lm
	LOR		0.73	0.73
	CRI		80	80
	Total Power		17.8W	33.6W
	Power Factor		0.95	0.94
	Running Current		0.08A	0.15A
	Inrush Current (Std)		15.0A (100us)	17.0A (184us)
	Inrush Current (Dim)		4.97A (45us)	24.1A (181us)
	Efficacy		116 lm/W	120 lm/W
	Emergency Output		307 (11%)	464 (8%)
	Energy Efficiency Class of Light Source		C	C
4	Neutral White LED (4000K)	CRI 80	15W	31W
	Lumen Output		3012 lm	5862 lm
	LOR		0.73	0.73
	CRI		80	80
	Total Power		17.8W	33.6W
	Power Factor		0.95	0.94
	Running Current		0.08A	0.15A
	Inrush Current (Std)		15.0A (100us)	17.0A (184us)
	Inrush Current (Dim)		4.97A (45us)	24.1A (181us)
	Efficacy		124 lm/W	127 lm/W
	Emergency Output		326 (11%)	492 (8%)
	Energy Efficiency Class of Light Source		B	B

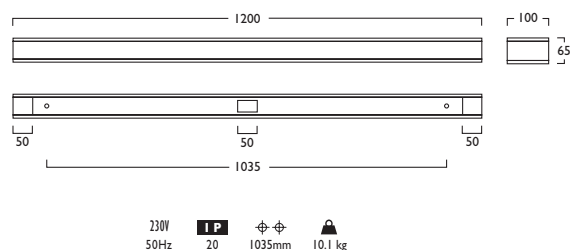

Linaj 981

LED

15W	LED	1200mm	WL981	—	LED	—	15	—	+	433
31W	LED	1200mm	WL981	—	LED	—	31	—	+	433

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)


Luminescent Trim - Examples Shown on page 2

- Sleek stunning minimalistic design
- Available in a choice of lumen outputs up to 5862 lumens
- Efficacies up to 127 lm/W
- High quality 10mm Etched glass to upper and lower fascia
- 72,000 hour life expectancy (L80 B10)
- Horizontal and vertical mounting, Linaj Link format available
- Striking optional Luminescent Trims offer colour customisation
- Wireless Lighting Control available

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V4 - 07/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.


Hacel[®]
Fluent in Lighting

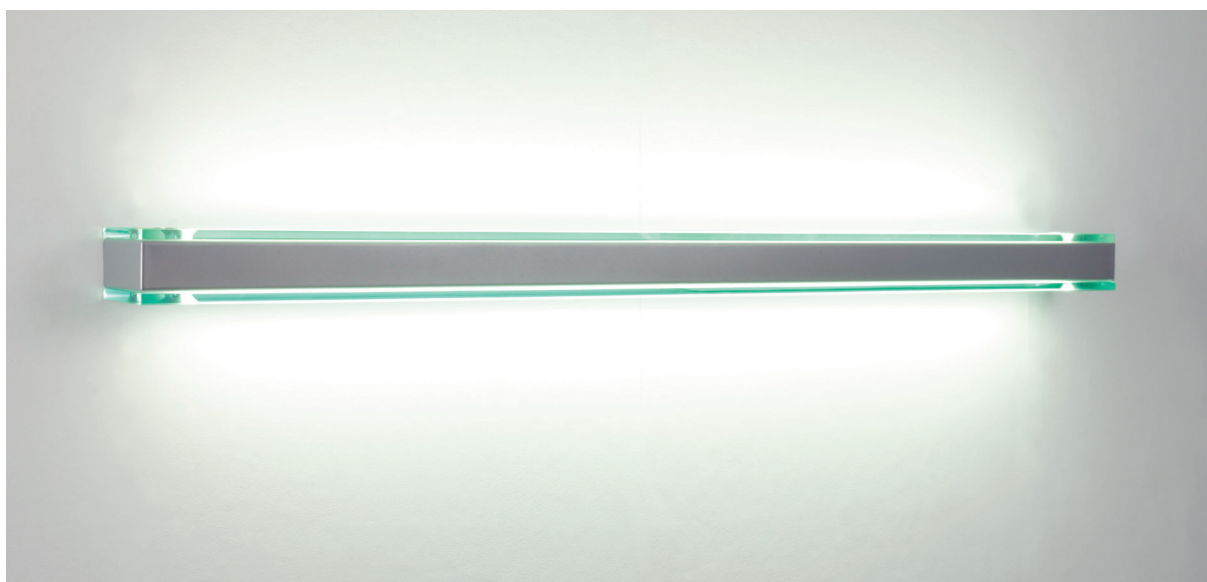


Linaj 981

Options


■ Luminescent Trim



275 Neptune Blue




276 Mars Red



278 Acid Green

Photometrics



433 ULOR: 0.36 DLOR: 0.37