




Linear Light5


UGR Direct Indirect

Link & Solo Suspended




- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions
- Wireless Lighting Control available

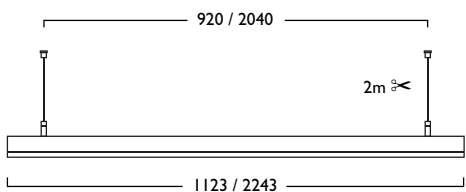


Link Suspended




Direct InDirect

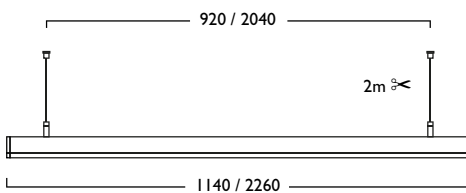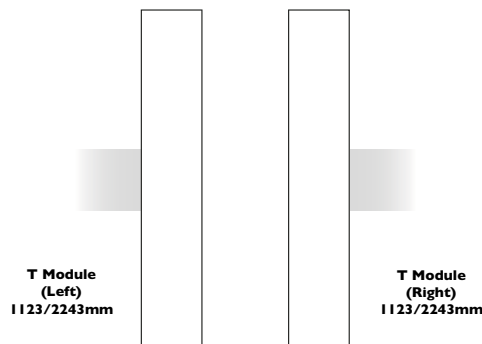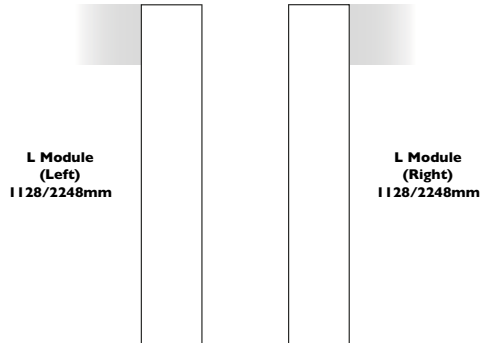

Solo Suspended



Direct InDirect



Viewed from above

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.



Linear Light5 UGR Direct Indirect

Link & Solo Modules

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1123mm	LB 1027	LED	40	+	496
79W	LED	2243mm	LB 1051	LED	79	+	497

Link L Modules (Left)

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1128mm	LB 1031	LED	40	+	496
79W	LED	2248mm	LB 1055	LED	79	+	497

Link L Modules (Right)

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1128mm	LB 1035	LED	40	+	496
79W	LED	2248mm	LB 1059	LED	79	+	497

Link T Modules (Left)

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1123mm	LB 1039	LED	40	+	496
79W	LED	2243mm	LB 1063	LED	79	+	497

Link T Modules (Right)

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1123mm	LB 1043	LED	40	+	496
79W	LED	2243mm	LB 1067	LED	79	+	497

Link X Modules

Power	LED	Length	Module	LED	Temp	Options	Price
40W	LED	1123mm	LB 1047	LED	40	+	496
79W	LED	2243mm	LB 1071	LED	79	+	497

X Modules not available in Emergency Gear Types

230V 50Hz	IP 20	⊕ ⊖	LB, LE 920 X 80mm 2040 X 80mm	⚠ 7.7 kg 15.4 kg
--------------	----------	-----	-------------------------------------	------------------------

- Contemporary LED Module with high quality Micro Prism refractor offering UGR 16.7
- Available in a choice of lumen outputs, delivering up to 14832 lumens
- Efficacies up to 119 lm/W
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 4x 2m suspension wires and chrome clutches for ease of adjustment
- Digital Dim and Digital Dim + Emergency options available

LB Link Suspended (Direct/Indirect) LE Solo Suspended (Direct/Indirect)

- A Integral Driver/Remote
- E Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

- 556 4x 5m Suspensions (wires only)
- 557 2x 2m Single point, twin suspensions (wires only)
- 144 2x 5m Single point, twin suspensions (wires only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk


* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.



Linear Light5 UGR Direct Indirect

	CRI 80	
	40W	79W
3 Warm White LED (3000K)		
Lumen Output	6873 lm	13746 lm
LOR	0.70	0.70
CRI	80	80
Total Power	42.0W	84.0W
Power Factor	0.98	0.98
Running Current	0.19A	0.37A
Inrush Current	57.7A (217us)	115.4A (217us)
Efficacy	114 lm/W	114 lm/W
Emergency Output (BLF)	595 lm (13%)*	595 lm (6.5%)*
4 Neutral White LED (4000K)		
Lumen Output	7191 lm	14382 lm
LOR	0.70	0.70
CRI	80	80
Total Power	42.0W	84.0W
Power Factor	0.98	0.98
Running Current	0.19A	0.37A
Inrush Current	57.7A (217us)	115.4A (217us)
Efficacy	119 lm/W	119 lm/W
Emergency Output (BLF)	623 lm (13%)*	623 lm (6.5%)*

* % of Direct illumination



496-497 DLOR: 0.51 ULOR: 0.19