




Linear Light5


UGR Direct

Link & Solo Suspended & Surface


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions
- Wireless Lighting Control available

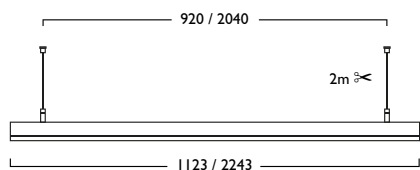


Link Suspended




Direct




L Module (Left)
1128/2248mm



L Module (Right)
1128/2248mm

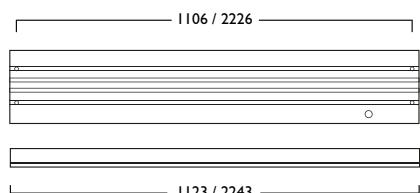

Link Surface




Direct




T Module (Left)
1123/2243mm




T Module (Right)
1123/2243mm

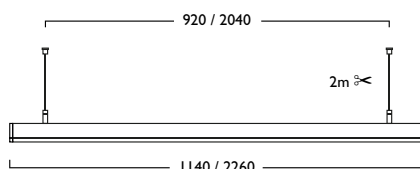


Solo Suspended




Direct



X Module
1123/2243mm

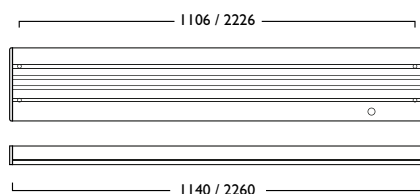

Solo Surface



Direct

Viewed from above



Linear Light5 UGR Direct

Link & Solo Modules

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1123mm	1025	LED	26	+	494		
53W LED	2243mm	1049	LED	53	+	495		

Link L Modules (Left)

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1128mm	1029	LED	26	+	494		
53W LED	2248mm	1053	LED	53	+	495		

Link L Modules (Right)

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1128mm	1033	LED	26	+	494		
53W LED	2248mm	1057	LED	53	+	495		

Link T Modules (Left)

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1123mm	1037	LED	26	+	494		
53W LED	2243mm	1061	LED	53	+	495		

Link T Modules (Right)

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1123mm	1041	LED	26	+	494		
53W LED	2243mm	1065	LED	53	+	495		

Link X Modules

LED	☀️	📏	🏠	☐	Ⓚ	🔌	+	⚠️
26W LED	1123mm	1045	LED	26	+	494		
53W LED	2243mm	1069	LED	53	+	495		

X Modules not available in Emergency Gear Types

230V	IP	⊕ ⊖	LA, LD	LC, LF	🏠
50Hz	20		920 X 80mm 2040 X 80mm	1106 X 80mm 2226 X 80mm	7.5 kg 15.0 kg

- Contemporary LED Module with high quality Micro Prism refractor offering UGR 18.9
- Available in a choice of lumen outputs, delivering up to 9588 lumens
- Efficacies up to 122 lm/W
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 4x 2m suspension wires and chrome clutches for ease of adjustment
- Digital Dim and Digital Dim + Emergency options available

LA	Link Suspended	LC	Link Surface
LD	Solo Suspended	LF	Solo Surface

A	Integral Driver/Remote
E	Emergency
J	Switch Dim
K	Switch Dim + Emergency
S	DALI Dim
T	DALI Dim + Emergency
C	DALI Dim + DALI Emergency
L	DALI Bluetooth
M	DALI Bluetooth + Emergency

3	Warm (3000K)	4	Neutral (4000K)
---	--------------	---	-----------------

1	White (RAL 9010)	2	Urban Graphite (RAL 7046)	3	Black (RAL 9005)
---	------------------	---	---------------------------	---	------------------

556	4x 5m Suspensions (wires only)
557	2x 2m Single point, twin suspensions (wires only)
144	2x 5m Single point, twin suspensions (wires only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk


* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.



Linear Light5 UGR Direct

3	Warm White LED (3000K)	CRI 80	26W	53W
	Lumen Output		4582 lm	9164 lm
	LOR		0.75	0.75
	CRI		80	80
	Total Power		29.4W	58.9W
	Power Factor		0.95	0.95
	Running Current		0.13A	0.27A
	Inrush Current		15.0A (250us)	30.0A (250us)
	Efficacy		116 lm/W	116 lm/W
	Emergency Output (BLF)		595 lm (13%)	595 lm (6.5%)

4	Neutral White LED (4000K)	CRI 80	26W	53W
	Lumen Output		4794 lm	9588 lm
	LOR		0.75	0.75
	CRI		80	80
	Total Power		29.4W	58.9W
	Power Factor		0.95	0.95
	Running Current		0.13A	0.27A
	Inrush Current		15.0A (250us)	30.0A (250us)
	Efficacy		122 lm/W	122 lm/W
	Emergency Output (BLF)		623 lm (13%)	623 lm (6.5%)



494-495 DLOR: 0.75