



Suspended & Surface


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Neatly integrates general, accent and ambient lighting
- Engineering excellence with contemporary styling
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Link Suspended

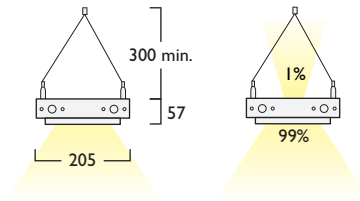


+ Light Spill



Link Surface




Link Surface + Light Spill




Suspended & Surface


- Designed to complement Link Modules
- Slim, sleek design enhanced by choice of surface and suspended options
- Choice of light sources available
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Solo Suspended

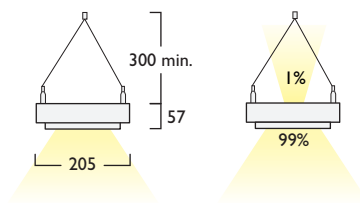


+ Light Spill




Solo Surface



Solo Surface + Light Spill



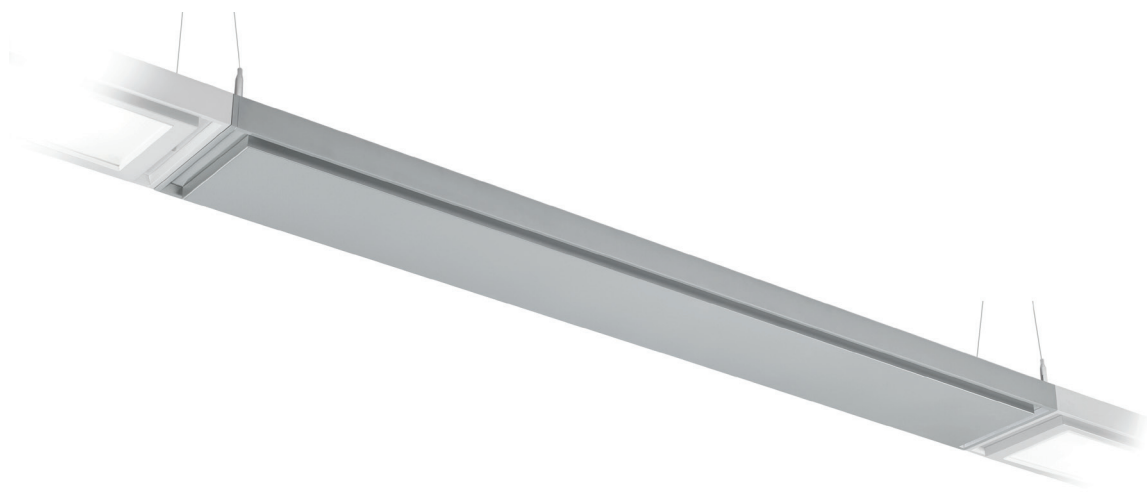

Linear Light⁴ Spacer/Components

Link Modules

	205mm	600mm	750mm	1250mm	1500mm
Spacer (inc. seven wire harness)	LL 027	640	028	660	029
Spacer (inc. seven wire harness)	LA016	SPA016	SPA016	SPA016	SPA016
Spacer (inc. seven wire harness)	—	—	—	—	—
Spacer (inc. seven wire harness)	—	—	—	—	—
Spacer (inc. seven wire harness)	—	—	—	—	—
230V 50Hz	IP 20	—	—	—	—
LA440	LA028	LA460	LA029	—	—
577mm	727mm	1227mm	1477mm	—	—
LC/LG640	LC/LG028	LC/LG660	LC/LG029	—	—
300mm	450mm	1148mm	900mm	—	—
027	640	028	660	029	—
1.4 kg	3.5 kg	4.4 kg	6.7 kg	8.0 kg	—

Alternative sizes are available on request

PIR Spacer

	205mm	600mm	750mm	1250mm	1500mm
Spacer (inc. seven wire harness)	LL 036	708	037	717	038
Spacer (inc. seven wire harness)	PIR016	PIR016	PIR016	PIR016	PIR016
Spacer (inc. seven wire harness)	—	—	—	—	—
Spacer (inc. seven wire harness)	—	—	—	—	—
Spacer (inc. seven wire harness)	—	—	—	—	—
230V 50Hz	IP 20	—	—	—	—
LA708	LA037	LA717	LA038	—	—
577mm	727mm	1227mm	1477mm	—	—
LC/LG708	LC/LG037	LC/LG717	LC/LG038	—	—
300mm	450mm	1148mm	900mm	—	—
036	708	037	717	038	—
1.5 kg	3.6 kg	4.5 kg	6.8 kg	8.1 kg	—

PIR Spacer only suitable for use with Luminaires with Gear Types F, G


Connectors/End Cap

	LL032	LL033	LL034	LL035
L Connector	A	A	A	X
T Connector	CON016	CON016	CON016	CAP000
X Connector	—	—	—	—
Module End Cap	—	—	—	—

Connectors

	LL039	LL040	LL041
L PIR Connector	A	A	A
T PIR Connector	PIR016	PIR016	PIR016
X PIR Connector	—	—	—

230V 50Hz IP 20 1.5 kg

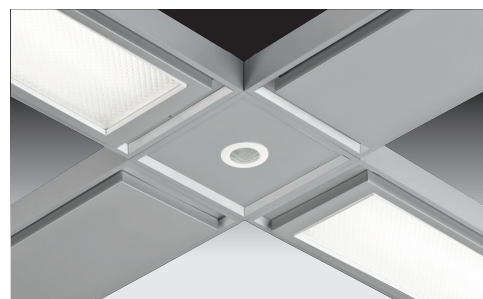


An inbuilt PIR Detector provides individual control via various operating modes to improve energy efficiency.

Control Devices

PIR Controller CD1602 X PIR000


- The PIR Detector defaults can be modified with the use of the PIR Controller (contact Technical for advice)



L, T & X Connectors



Module End Cap

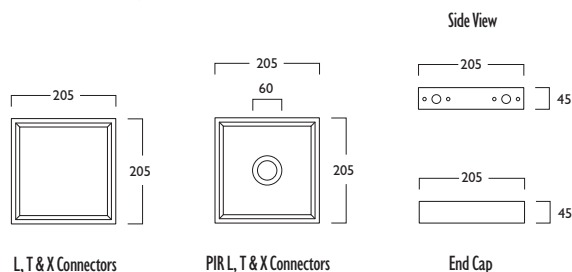

L, T & X Connectors

PIR L, T & X Connectors

End Cap

- LA Link Suspended LC Link Surface LL PIR Blank Spacer
- A No Control Gear 230V
- X Non Electrical Component
- S Dimmable Gear
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- 144 2x 5m Twin suspensions (wires only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V3 - 08/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.