




SkyMod® IP65 Wafer Grid



LED

17W	LED	IM1590	—	LED	4	17	1	584
25W	LED	IM1590	—	LED	4	25	1	584
36W	LED	IM1590	—	LED	4	36	1	584

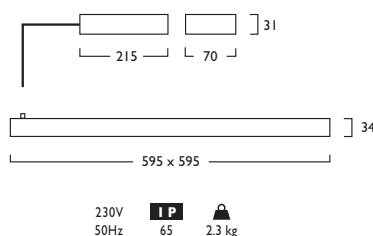


Designed for 1.5mm and 25mm T grid ceilings

4	Neutral White LED (4000K)	CRI 80	17W	25W	36W
	Lumen Output		2040 lm	3000	4320
	LOR		1.00	1.00	1.00
	CRI		80	80	80
	Total Power		19.4W	27.8W	39.6W
	Power Factor		0.96	0.97	0.96
	Running Current		0.09A	0.11A	0.16A
	Inrush Current		18A (210us)	24A (200us)	25A (250us)
	Inrush Current (Dim)		10A (50us)	10A (50us)	28A (195us)
	Efficacy		105 lm/W	107 lm/W	109 lm/W
	Emergency Output (BLF)		316 lm (15%)	316 lm (11%)	316 lm (8%)

- Slim profile of only 34mm
- IP65 rated from below
- High quality Polycarbonate Micro Prism refractor offering UGR <19
- TP(a) rated as standard
- Delivering up to 4320 lumens
- Efficacies up to 109 lm/W
- Life expectancy in excess of 57,000 hours (L80 B10)
- Wide choice of high quality control gear
- Wireless Lighting Control available, see Connected video for full overview
- Digital Dim and Digital Dim + Emergency options available

Photometrics



584 DLOR: 1.00

- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

4 Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

V5 - 04/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

Hacel
Fluent in Lighting