


## SkyMod® Wafer Linear Grid



LED

17W	LED	IM1589	—	LED	—	17	1	609
23W	LED	IM1589	—	LED	—	23	1	609
29W	LED	IM1589	—	LED	—	29	1	609

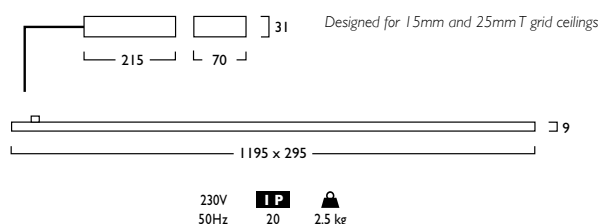

3	Warm White LED (3000K)	CRI 80	17W	23W	29W
	Lumen Output		2106 lm	2759 lm	3405 lm
	LOR		1.00	1.00	1.00
	CRI		80	80	80
	Total Power		18.8W	25.4W	32.3W
	Power Factor		0.96	0.97	0.97
	Running Current		0.08A	0.11A	0.13A
	Inrush Current (Std)		18A (210us)	18A (210us)	24A (200us)
	Inrush Current (Dim)		10A (80us)	10A (50us)	10A (50us)
	Efficacy		112 lm/W	108 lm/W	105 lm/W
	Emergency Output (BLF)		188 lm (8%)	188 lm (7%)	188 lm (5%)

4	Neutral White LED (4000K)	CRI 80	17W	23W	29W
	Lumen Output		2319 lm	2998 lm	3688 lm
	LOR		1.00	1.00	1.00
	CRI		80	80	80
	Total Power		18.8W	25.4W	32.3W
	Power Factor		0.96	0.97	0.97
	Running Current		0.08A	0.11A	0.13A
	Inrush Current (Std)		18A (210us)	18A (210us)	24A (200us)
	Inrush Current (Dim)		10A (80us)	10A (50us)	10A (50us)
	Efficacy		123 lm/W	118 lm/W	114 lm/W
	Emergency Output (BLF)		210 lm (8%)	201 lm (7%)	201 lm (5%)

- Ultra slim profile of only 9mm
- High quality Polycarbonate Micro Prism refractor offering UGR <19
- Delivering up to 3688 lumens
- Efficacies up to 123 lm/W
- Life expectancy in excess of 50,000 hours (L80 B10)
- Wide choice of high quality control gear
- Wireless Lighting Control available


- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales

### Photometrics



609 DLOR: 1.00

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)

V7 - 04/2026

\* All values provided in this document are subject to international standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve its product and reserve the right to change specifications without prior notification.

\* UGR<19 compliant based on spacing @ 1.0 based on BS EN12464 part 1 2024, Clause 5.5.3.2