



3	Warm White LED (3000K)	CRI 80	8W	11W	14W
	Delivered Lumens		1202 lm	1686 lm	2163 lm
	LOR		1.0	1.0	1.0
	CRI		80	80	80
	Total Power		8.4W	11.8W	15.3W
	Power Factor		0.90	0.94	0.95
	Running Current		0.04A	0.05A	0.07A
	Inrush Current (Std)		3.0A (60us)	3.5A (35us)	18.0A (210us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (50us)	10.0A (50us)
	Efficacy		143 lm/W	142 lm/W	141 lm/W
	Emergency Output		414 lm	414 lm	414 lm
	Energy Efficiency Class of Light Source		C	C	C

4	Neutral White LED (4000K)	CRI 80	8W	11W	14W
	Delivered Lumens		1267 lm	1774 lm	2271 lm
	LOR		1.0	1.0	1.0
	CRI		80	80	80
	Total Power		8.4W	11.8W	15.3W
	Power Factor		0.90	0.94	0.95
	Running Current		0.04A	0.05A	0.07A
	Inrush Current (Std)		3.0A (60us)	3.5A (35us)	18.0A (210us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (50us)	10.0A (50us)
	Efficacy		150 lm/W	150 lm/W	148 lm/W
	Emergency Output		438 lm	438 lm	438 lm
	Energy Efficiency Class of Light Source		C	C	C

Solenz® 100

LED	☀	👁	⏻	Ⓚ	🔊	+	⚠
8W LED ID1375	—	LED	—	08	—	+	795
11W LED ID1375	—	LED	—	11	—	+	795
14W LED ID1375	—	LED	—	14	—	+	795


■ Add the required Lens/Cowl to code from list shown on page 2 (Lens/Cowl - Options)

- Let our lens technology do all of the work. Cowl colour has no effect on beam angle or outputs.
- Efficacies up to 150 lm/W
- Available in a choice of lumen outputs, delivering up to 2271 lumens
- Life expectancy in excess of 60,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Range of options for customisation available
- [Wireless Lighting Control](#) available
- CRI90 options available - ID1376
- IP44 rated as standard with optional IP65 gasket
- Complementary [Surface](#) and [Pendant](#) versions available

- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

- 3** Warm (3000K) **4** Neutral (4000K)
- 1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

■ Lens/Cowl Options - Examples Shown on page 2

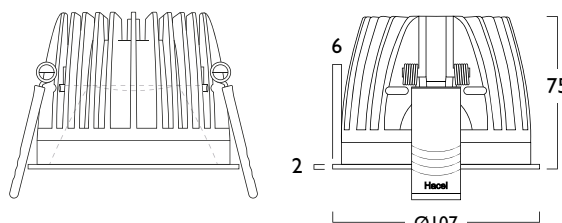

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk 02/2026 - V3

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.





Solenz® 100 Options

Options

■ Lens / Cowl & Accessory Options



Lens / Cowl

673 66° Lens with White Cowl

674 66° Lens with Black Cowl

675 66° Lens with Urban Graphite Cowl



CR100

795

795

795


Cowl will match body colour unless otherwise specified.



■ **682** Cylo Etched Ice

■ **684** IP65 Gasket

Photometrics

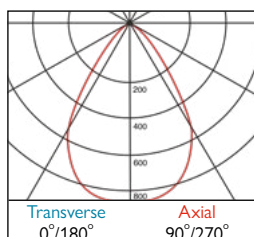

795 DLOR: 1.0

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.