


Wallwasher Micro

LED
6W LED ID1629 LED 06 1 358


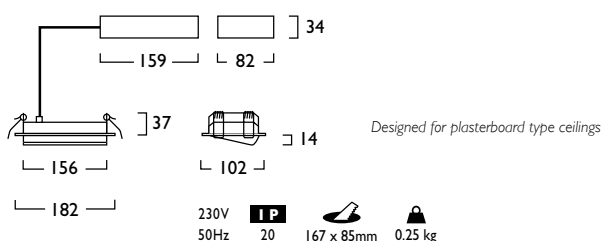


3	Warm White LED (3000K)	CRI 80 6W
	Lumen Output	964 lm
	LOR	0.82
	CRI	80
	Total Power	6.8W
	Power Factor	0.93
	Running Current	0.03A
	Inrush Current (Std)	4.3A (32us)
	Inrush Current (Dim)	10.0A (80us)
	Efficacy	116 lm/W
	Emergency Output (BLF)	N/A

4	Neutral White LED (4000K)	CRI 80 6W
	Lumen Output	1013 lm
	LOR	0.82
	CRI	80
	Total Power	6.8W
	Power Factor	0.93
	Running Current	0.03A
	Inrush Current (Std)	4.4A (32us)
	Inrush Current (Dim)	10.0A (80us)
	Efficacy	122 lm/W
	Emergency Output (BLF)	N/A

- Unique extruded aluminium 'drop down' asymmetric design
- Available in a choice of lumen outputs, delivering up to 1013 lumens
- Efficacies up to 122 lm/W
- Delivers illumination directly into the wall and ceiling junction
- Colour stability within 3 MacAdams
- Life expectancy in excess of 72,000 hours (L80 B10)
- Wireless Lighting Control available

Photometrics

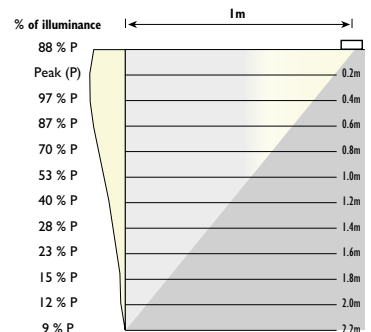

- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim
- L** DALI Bluetooth

3 Warm (3000K) **4** Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V4 - 05/2026

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.