


Wallwasher Midi



LED

7W	LED	ID1631	LED	07	1	358
10W	LED	ID1631	LED	10	1	358
14W	LED	ID1631	LED	14	1	358

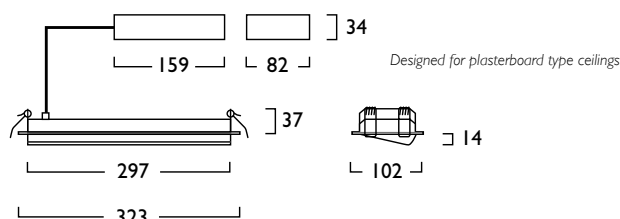

230V
50Hz

IP
20

308x 85mm

0.5 kg

3	Warm White LED (3000K)	CRI 80	7W	10W	14W
	Lumen Output		1224 lm	1761 lm	2339 lm
	LOR		0.83	0.83	0.83
	CRI		80	80	80
	Total Power		7.7W	11.4W	14.9W
	Power Factor		0.55	0.55	0.98
	Running Current		0.02A	0.03A	0.06A
	Inrush Current (Std)		10.0A (115us)	14.5A (114us)	20.0A (200us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (80us)	10.0A (80us)
	Efficacy		130 lm/W	128 lm/W	130 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A
4	Neutral White LED (4000K)	CRI 80	7W	10W	14W
	Lumen Output		1287 lm	1852 lm	2460 lm
	LOR		0.83	0.83	0.83
	CRI		80	80	80
	Total Power		7.7W	11.4W	14.9W
	Power Factor		0.55	0.55	0.98
	Running Current		0.02A	0.03A	0.06A
	Inrush Current (Std)		10.0A (115us)	14.5A (114us)	20.0A (200us)
	Inrush Current (Dim)		10.0A (80us)	10.0A (80us)	10.0A (80us)
	Efficacy		136 lm/W	134 lm/W	137 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A

- Unique extruded aluminium 'drop down' asymmetric design
- Available in a choice of lumen outputs, delivering up to 2460 lumens
- Efficacies up to 137 lm/W
- Colour stability within 3 MacAdams
- Delivers illumination directly into the wall and ceiling junction
- Life expectancy in excess of 72,000 hours (L80 B10)
- Wireless Lighting Control available



- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim
- L** DALI Bluetooth

3 Warm (3000K) **4** Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales

Photometrics

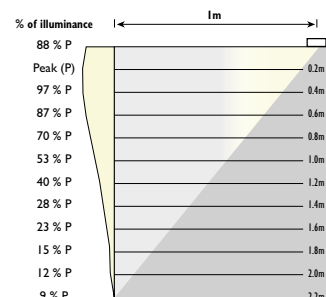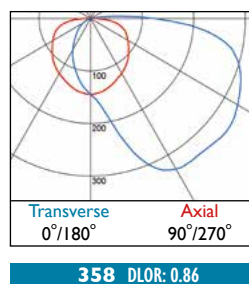

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V4 - 05/2026

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.