



## Xcel® 4




### LED CRI 80

7W LED ID1255 LED 7 597

### LED CRI 90

7W LED ID1256 LED 7 598

- Injection moulded Shade and Lens construction
- Superior lighting class LED Modules and Drivers
- Lumens output up to 1182 lm with a UGR <19
- Efficacies up to 134 lm/W
- Life expectancy in excess of 75,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Emergency LED (charge/fault) requires additional mounting hole
- Wireless Lighting Control available
- Digital Dim and Digital Dim + Emergency options available

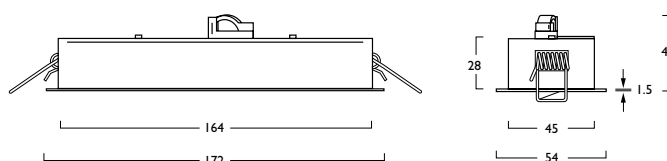

240V 50Hz IP20 167 x 47mm 0.45 kg 0.62 kg EM

### 3 Warm White LED (3000K)

Lumen Output	1130 lm
LOR	0.76
CRI	80
Total Power	6.7W
Power Factor	0.98
Running Current	0.03A
Inrush Current	17.0A (231us)
Efficacy	128 lm/W
Emergency Output (BLF)	N/A

### CRI 80 7W

### CRI 90 7W

Lumen Output	980 lm
LOR	0.76
CRI	90
Total Power	6.7W
Power Factor	0.98
Running Current	0.03A
Inrush Current	17.0A (231us)
Efficacy	111 lm/W
Emergency Output (BLF)	N/A

### 4 Neutral White LED (4000K)


Lumen Output	1182 lm
LOR	0.76
CRI	80
Total Power	6.7W
Power Factor	0.98
Running Current	0.03A
Inrush Current	17.0A (231us)
Efficacy	134 lm/W
Emergency Output (BLF)	399

### CRI 80 7W

### CRI 90 7W

Lumen Output	1023 lm
LOR	0.76
CRI	90
Total Power	6.7W
Power Factor	0.98
Running Current	0.03A
Inrush Current	17.0A (231us)
Efficacy	116 lm/W
Emergency Output (BLF)	399

### Photometrics

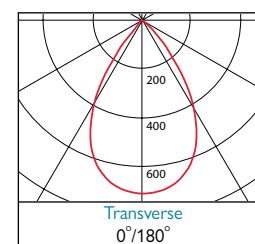

597 DLOR: 0.76

- A Integral Driver/Remote
- E Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk) V6 - 04/2026

\* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.