




3 Warm White LED (3000K)	CRI 80	23W	31W	39W	47W	54W	62W	70W
Delivered Lumens		1222 lm	1630 lm	2037 lm	2444 lm	2852 lm	3259 lm	3667 lm
LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
CRI		80	80	80	80	80	80	80
Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
Inrush Current (Std)		25.0A (250us)	50.0A (250us)					
Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
Emergency Output (BLF)		N/A						

4 Neutral White LED (4000K)		23W	31W	39W	47W	54W	62W	70W
Delivered Lumens		1229 lm	1638 lm	2048 lm	2457 lm	2867 lm	3276 lm	3686 lm
LOR		1.0	1.0	1.0	1.0	1.0	1.0	1.0
CRI		80	80	80	80	80	80	80
Total Power		26.5W	33.5W	42.1W	50.8W	58.3W	67.0W	75.6W
Power Factor		0.95	0.95	0.95	0.95	0.95	0.95	0.95
Running Current		0.12A	0.15A	0.19A	0.23A	0.27A	0.30A	0.35A
Inrush Current (Std)		25.0A (250us)	50.0A (250us)					
Inrush Current (Dim)		41.0A	41.0A	41.0A	41.0A	46.0A	46.0A	46.0A
Emergency Output (BLF)		N/A						

Explora® Halo Direct

LED CRI 80



23W	LED	Ø520mm	PN1715	LED	23	+	812
31W	LED	Ø680mm	PN1716	LED	31	+	813
39W	LED	Ø840mm	PN1717	LED	39	+	814
47W	LED	Ø1000mm	PN1718	LED	47	+	815
54W	LED	Ø1160mm	PN1719	LED	54	+	816
62W	LED	Ø1315mm	PN1720	LED	62	+	817
70W	LED	Ø1475mm	PN1721	LED	70	+	818

- A Integral Driver/Remote
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

SI Silver BL Black BR Brass CO Copper

264 3x 5m Suspensions (wires only)

- 693 Halo Ceiling Plate White
- 694 Halo Ceiling Plate Black
- 695 Halo Ceiling Plate Urban Graphite
- 696 Halo Surface Mounted Gear Housing White
- 697 Halo Surface Mounted Gear Housing Black
- 698 Halo Surface Mounted Gear Housing Urban Graphite

- Elegant LED circular pendant with 4 colour options for trim
- Available in seven sizes
- Lumen outputs from 1222 to 3686 lumens
- Life expectancy of 50,000hrs (L80 B10)
- Colour stability within 3 MacAdams
- Supplied with remote driver and a white ceiling plate, options available for Black and Urban Graphite plate and surface mounted driver housing
- Wireless Lighting Control available


Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V8 - 05/2025

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.


Hacel[®]
Fluent in Lighting




Explora® Halo Direct

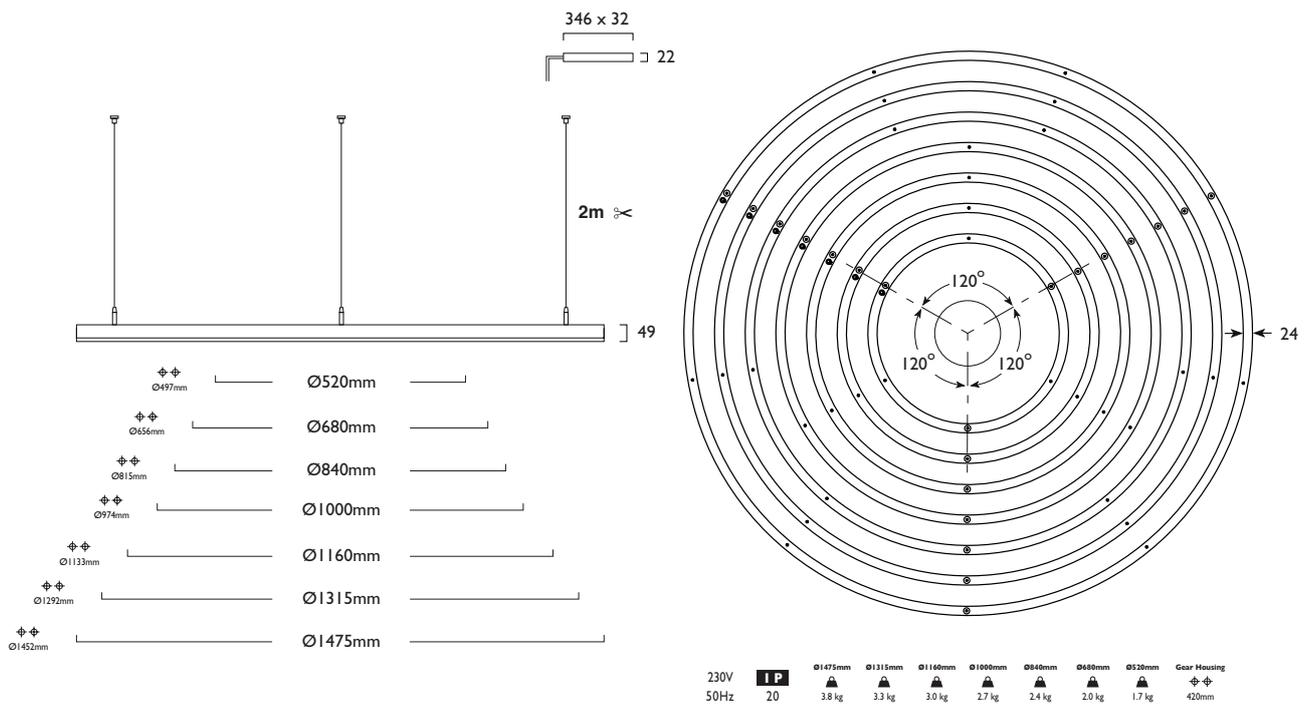


Photometrics



812-818 DLOR: 1.0

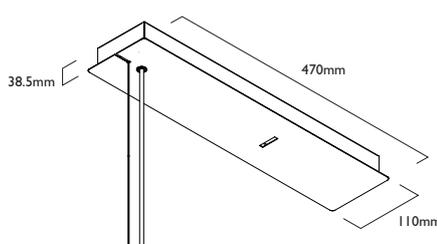

Surface Mounted Gear Housing

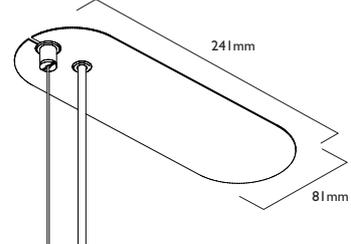

Ceiling Plate