




Infinitas® Micro Wall Light

Infinitas Micro by Hacer is a refined LED system. Designed and manufactured in the UK, Infinitas Micro is sophisticated and minimal in its design. Precision extruded luminaires are available in direct/indirect or direct only options.

As part of the Infinitas range, the flexibility of Infinitas Micro is further enhanced by the addition of this wall light, offering diversity in architectural lighting design.

- Offering a choice of lumen outputs, up to 4261 lumens
- Efficacies up to 137lm/W
- Life expectancy up to 102,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Fitted with an Opal diffuser as standard
- Corporate colours made to special order
- Choice of gear types available, including smart lighting controls


Modules **Fixing Centres** (mm)

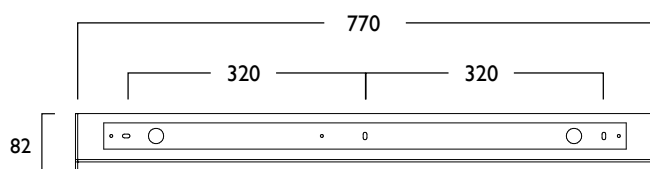

230V
50Hz

IP
20

 770mm
2.8 kg

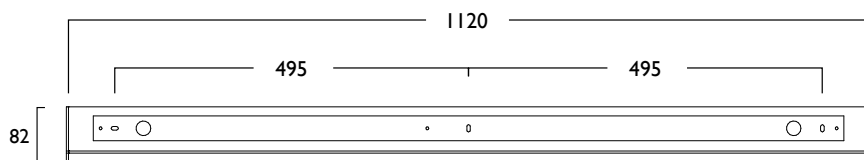

230V
50Hz


IP
20

 1120mm
4.5 kg



3	Warm White LED (3000K)	CRI 80	17W	24W
	Bare Lumen Output		2852 lm	4098 lm
	LOR		0.72	0.72
	CRI		80	80
	Total Power		18.8W	26.9W
	Power Factor		0.85	0.89
	Running Current		0.09A	0.13A
	Inrush Current (Std)		19.92A (350us)	19.92A (350us)
	Inrush Current (Dim)		40.1A (206us)	40.1A (206us)
	Efficacy		109 lm/W	110 lm/W
	Emergency Output		N/A	496 (12%)
	Energy Efficiency Class of Light Source		B	B

4	Neutral White LED (4000K)	CRI 80	17W	24W
	Bare Lumen Output		2979 lm	4621 lm
	LOR		0.72	0.72
	CRI		80	80
	Total Power		18.8W	26.9W
	Power Factor		0.85	0.89
	Running Current		0.09A	0.13A
	Inrush Current (Std)		19.92A (350us)	19.92A (350us)
	Inrush Current (Dim)		40.1A (206us)	40.1A (206us)
	Efficacy		114 lm/W	114 lm/W
	Emergency Output		N/A	504 (13%)
	Energy Efficiency Class of Light Source		B	B




Note: Figures above refer to standard A gear unless stated

Infinitas® Micro Direct/Indirect Wall Light

☀	📏	👁	📏	Ⓚ	📶	+	⚡	Opal
LED								
17W	LED	770mm	WL 1156	LED	17	+	825	
24W	LED	1120mm	WL 1158	LED	24	+	826	

770mm Not available in Emergency Gear Types.

Photometrics

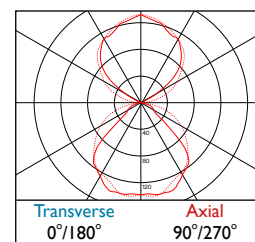

825-826 DLOR: 0.72

- A** Integral Driver/Remote
 - E** Emergency (WL1158 only)
 - J** Switch Dim
 - K** Switch Dim + Emergency (WL1158 only)
 - S** DALI Dim
 - T** DALI Dim + Emergency (WL1158 only)
 - C** DALI Dim + DALI Emergency (WL1158 only)
 - L** DALI Bluetooth
 - M** DALI Bluetooth + Emergency (WL1158 only)
- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk 03/2026 - V1


* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.





3	Warm White LED (3000K)	CRI 80 7W	11W
	Bare Lumen Output	1436 lm	2032 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	8.1W	11.7W
	Power Factor	0.86	0.89
	Running Current	0.04A	0.06A
	Inrush Current (Std)	11.92A (207us)	11.92A (207us)
	Inrush Current (Dim)	21.3A (206us)	21.3A (206us)
	Efficacy	129 lm/W	126 lm/W
	Emergency Output	N/A	495 (33%)
	Energy Efficiency Class of Light Source	B	B

4	Neutral White LED (4000K)	CRI 80 7W	11W
	Bare Lumen Output	1523 lm	2155 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	8.1W	11.7W
	Power Factor	0.86	0.89
	Running Current	0.04A	0.06A
	Inrush Current (Std)	11.92A (207us)	11.92A (207us)
	Inrush Current (Dim)	21.3A (206us)	21.3A (206us)
	Efficacy	137 lm/W	134 lm/W
	Emergency Output	N/A	524 (33%)
	Energy Efficiency Class of Light Source	B	B




Note: Figures above refer to standard A gear unless stated

Infinitas® Micro Direct Wall Light

☀️	📏	🏠	📱	Ⓚ	🔊	+	🔺	
LED							Opal	
7W	LED	770mm	WL 1152	LED	07	+		823
11W	LED	1120mm	WL 1154	LED	11	+		824

770mm Not available in Emergency Gear Types.

Photometrics

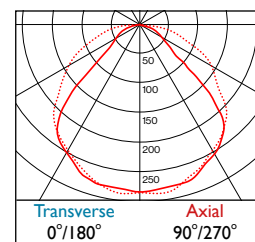

823-824 DLOR: 0.72

- A** Integral Driver/Remote
 - E** Emergency (WL1154 only)
 - J** Switch Dim
 - K** Switch Dim + Emergency (WL1154 only)
 - S** DALI Dim
 - T** DALI Dim + Emergency (WL1154 only)
 - C** DALI Dim + DALI Emergency (WL1154 only)
 - L** DALI Bluetooth
 - M** DALI Bluetooth + Emergency (WL1154 only)
- **3** Warm (3000K) ■ **4** Neutral (4000K)
- **1** White (RAL 9010) ■ **2** Urban Graphite (RAL 7046) ■ **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk 03/2026 - V1

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacer Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

