




3	Warm White LED (3000K)	CRI 80	32W	50W
	Lumen Output		4590 lm	6600 lm
	LOR		0.80	0.80
	CRI		80	80
	Total Power		35.3W	54.8W
	Power Factor		0.95	0.95
	Running Current		0.16A	0.25A
	Inrush Current (Std)		24.7A (268us)	25.9A (252us)
	Inrush Current (Dim)		28.0A (195us)	26.0A (264us)
	Efficacy		104 lm/W	96 lm/W
	Emergency Output (BLF)		367 lm (8%)	330 lm (5%)

4	Neutral White LED (4000K)	CRI 80	32W	50W
	Lumen Output		4890 lm	7080 lm
	LOR		0.80	0.80
	CRI		80	80
	Total Power		35.3W	54.8W
	Power Factor		0.95	0.95
	Running Current		0.16A	0.25A
	Inrush Current (Std)		24.7A (268us)	25.9A (252us)
	Inrush Current (Dim)		28.0A (195us)	26.0A (264us)
	Efficacy		110 lm/W	103 lm/W
	Emergency Output (BLF)		391 lm (8%)	354 lm (5%)

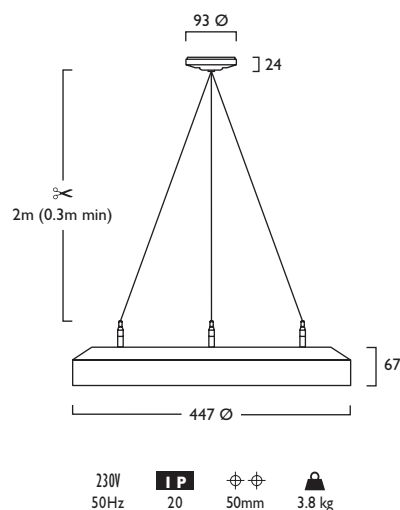

Solos[®] Pendant



LED

32W	LED	PN287	LED	32	+	356
50W	LED	PN287	LED	50	+	356

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Luminescent Halo Options Shown


353 3x 5m Suspensions (wires only)

- Slim circular contemporary luminaire
- High performance LED offering 100,000 hour life expectancy (L80 B10)
- Available in a choice of lumen outputs, delivering up to 7080 lumens
- Efficacies up to 110 lm/W
- Colour stability within 3 MacAdams
- 2m suspension supplied as standard (Optional 5m)
- Centre feature and housing available in White, Black and Graphite (shown)
- Complementary Downlight, Surface and Wall Light versions are available
- Wireless Lighting Control available, see Connected video for full overview

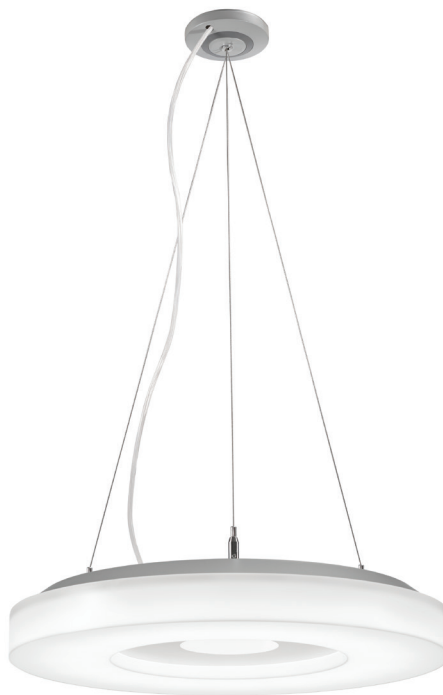


Solos[®] Pendant


■ Luminescent Halo Options



469 Neptune Blue




470 Mars Red



472 Acid Green

Photometrics

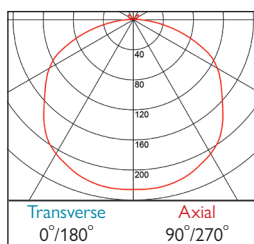

356 DLOR: 0.80